
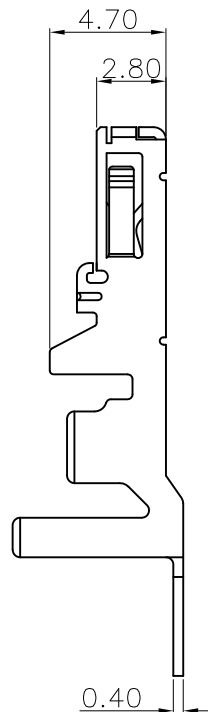




RoHS

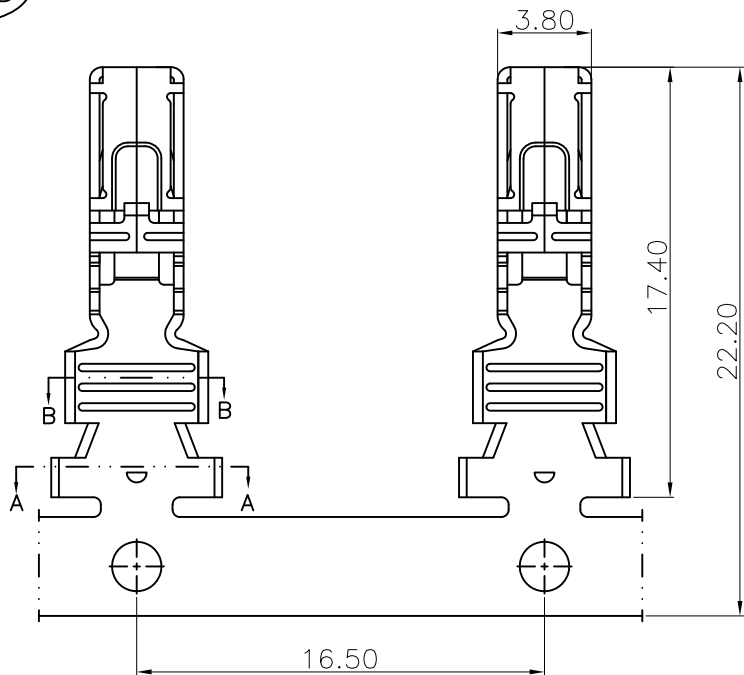

1.MATERIAL SPECIFICATION:
1-1.CONTACTS: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.DURABILITY: 30 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 30A AC/DC
RATED VOLTAGE : 600V AC/DC
4-2.CONTACT RESISTANCE: 5 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 2500V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -35°C~+90°C.
6.PACKAGE SPEC: REEL
7.P/N: A7925 T F X X- X

1-AWG #14~#16
2-AWG #10~#12

P-PHOSPHOR
BRONZE
B-BRASS

Part NO	Wire range	DIM A	DIM B	DIM C	DIM D
A7925TF1P-C	#14~#16	4.40	5.20	3.90	4.00
A7925TF1P-1	#14~#16	4.40	5.20	3.90	4.00
A7925TF2P-C	#10~#12	7.00	6.80	6.00	5.60

NO.of contacts	10 AWG	12 AWG	14 AWG	16 AWG
1	30A	25A	20A	15A
2	25A	20A	18A	15A
3	25A	20A	18A	15A
4	22A	18A	15A	13A
5	22A	18A	15A	13A

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A7925TFXX-X	DWG.NO: ENDE05	 WanLian Technology Co., Lt
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17			
				0.0±0.35	X*REF±6°						
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch 7.92mm HRS FEMALE Terminal	REV: A0	
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17			