
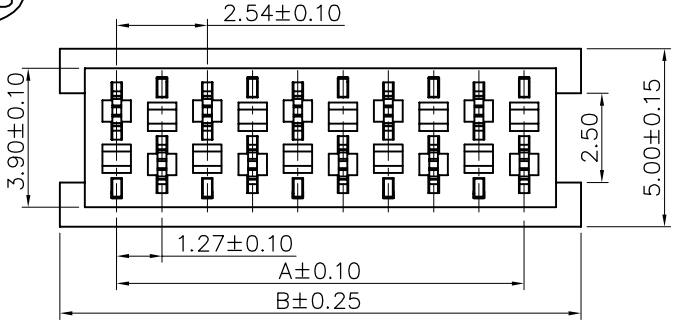
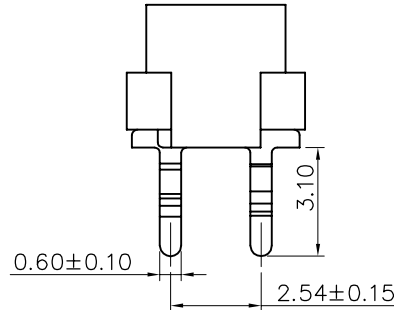
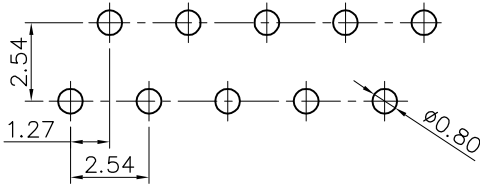
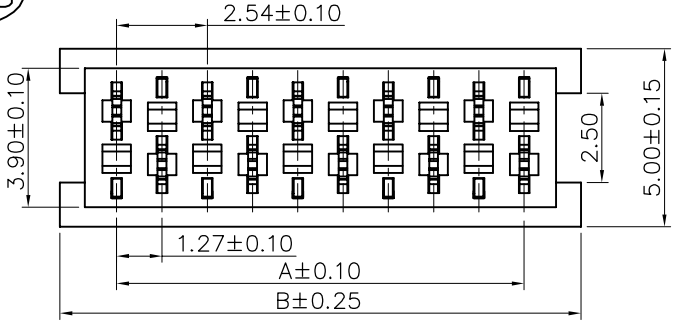
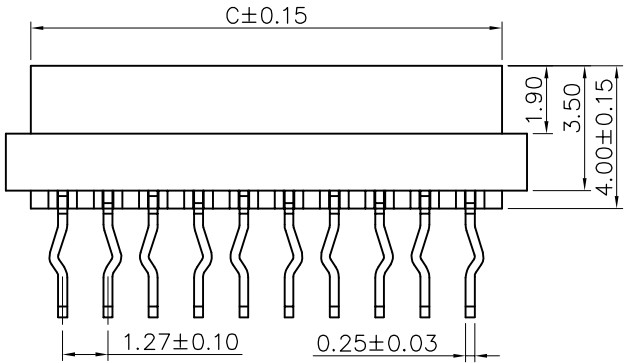
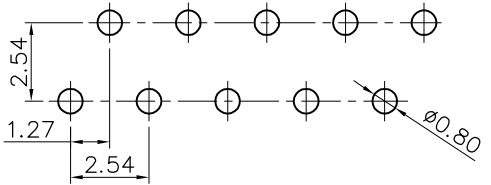
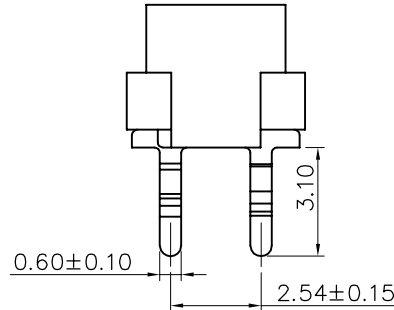
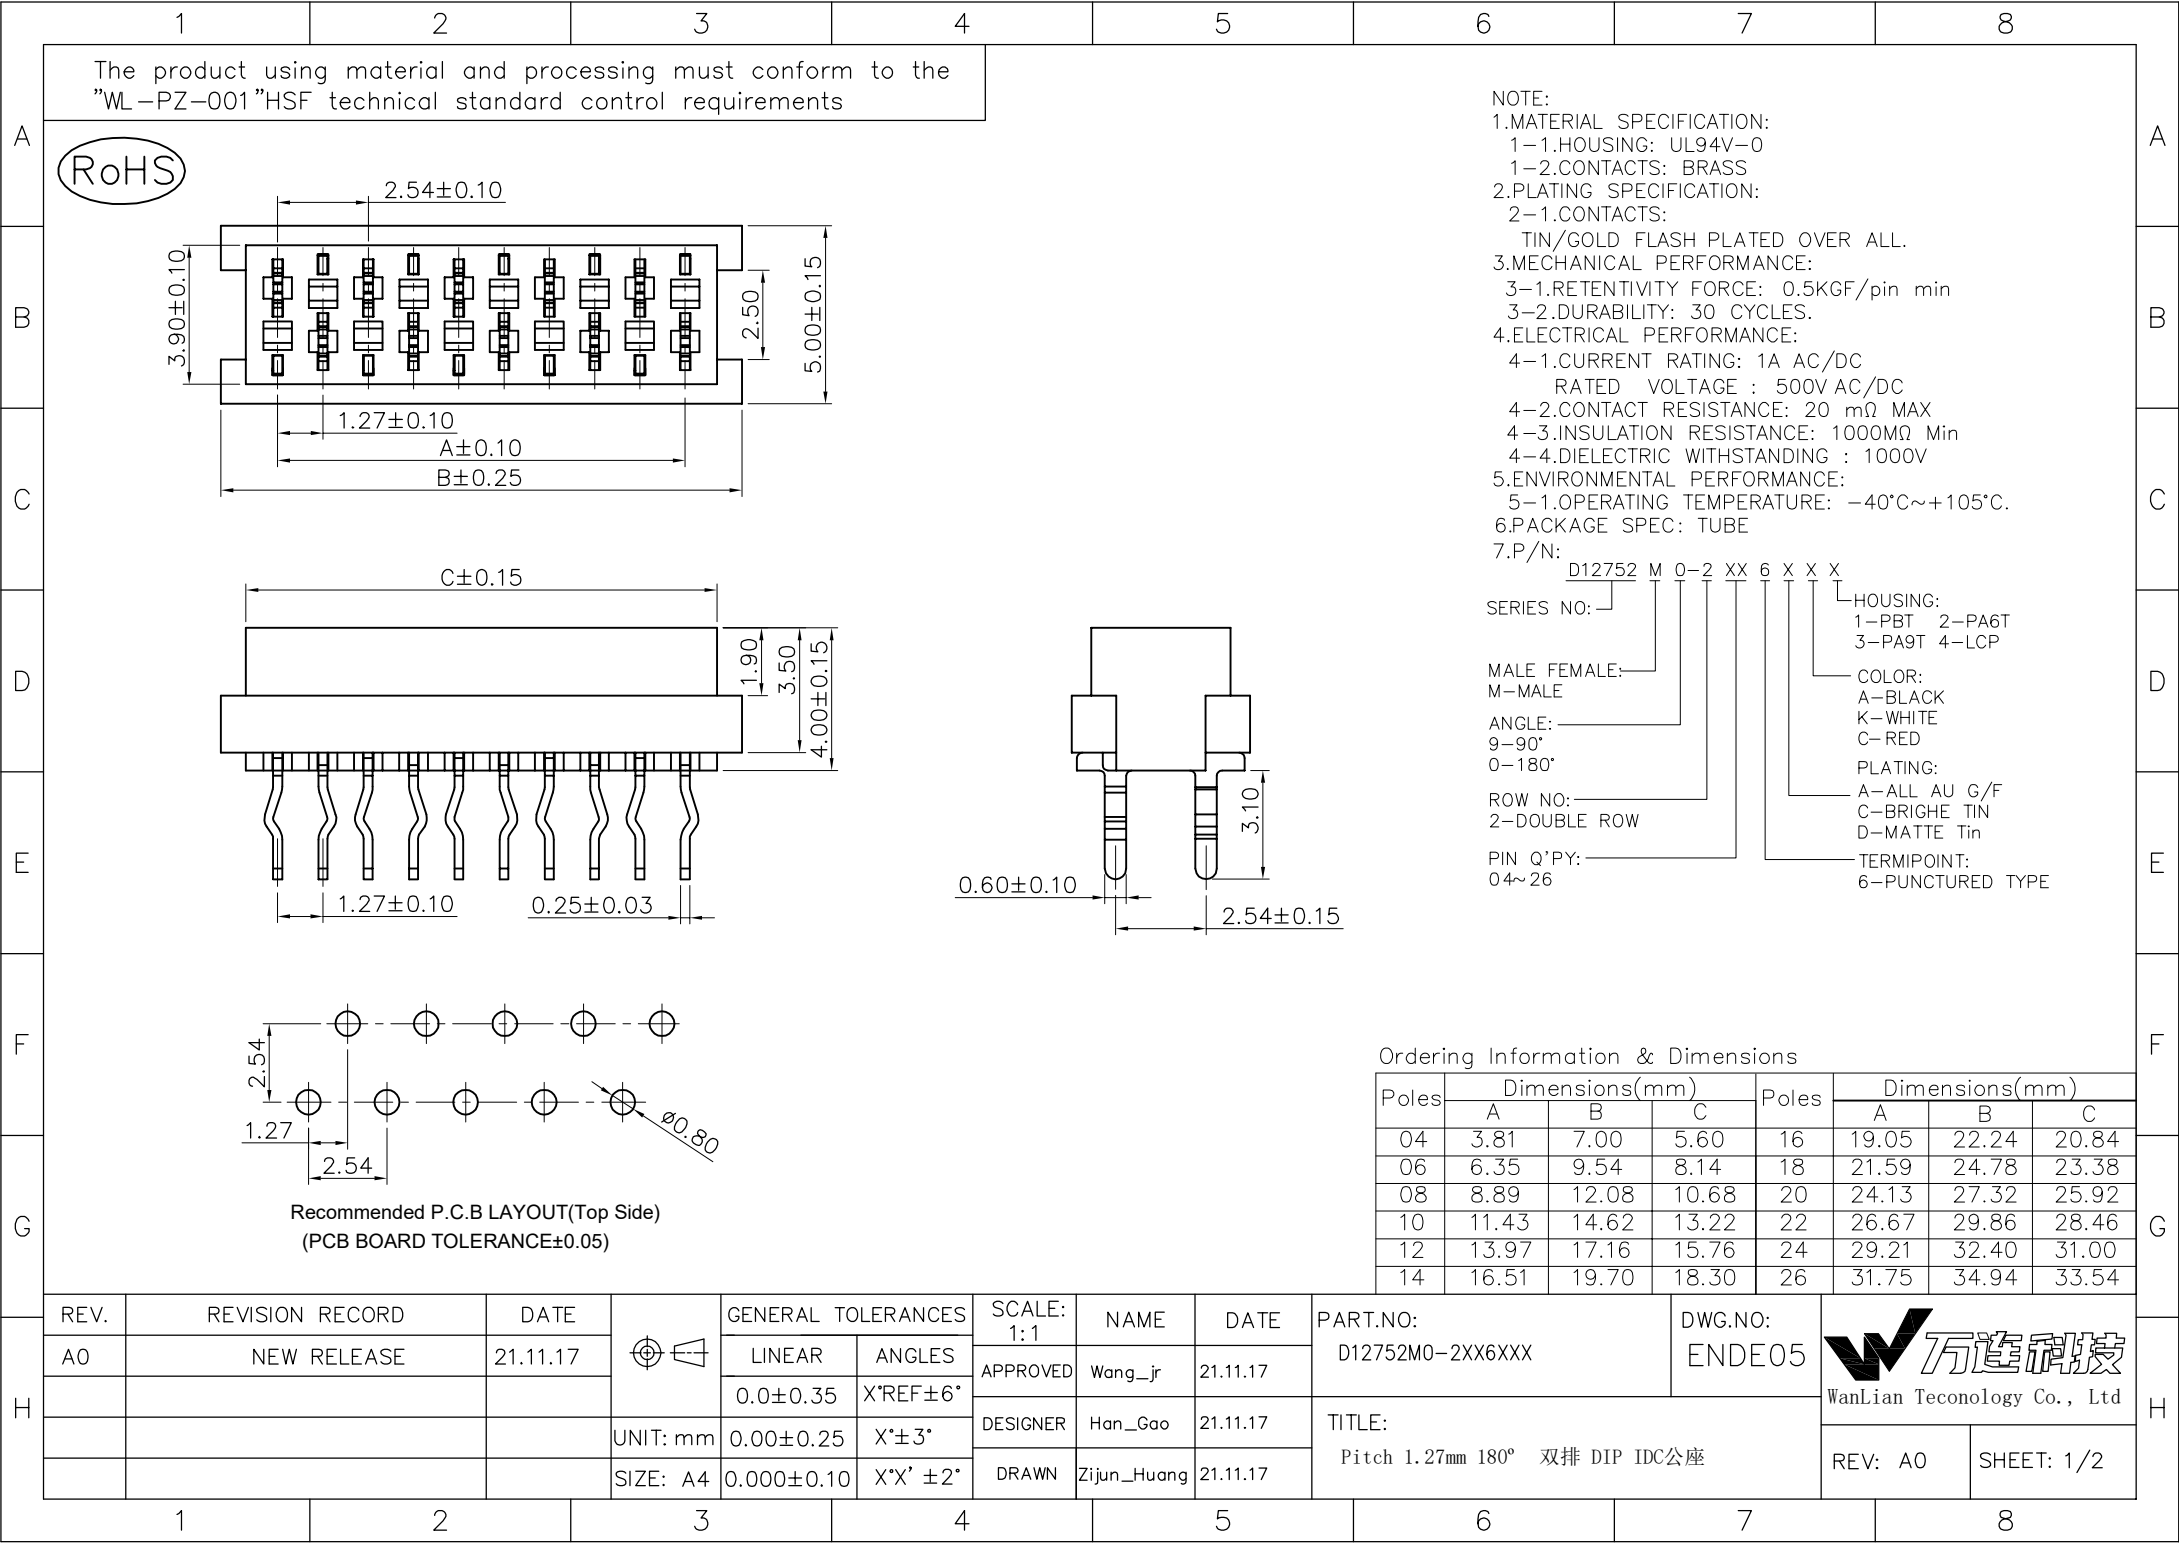
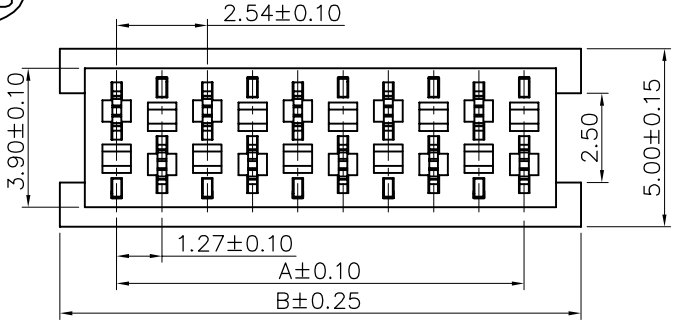
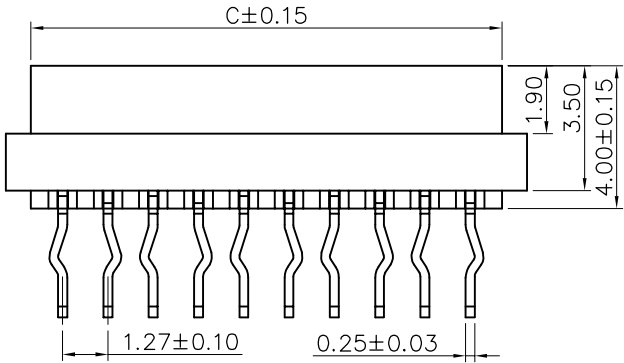
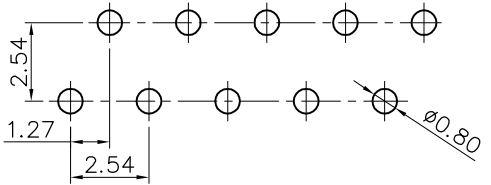
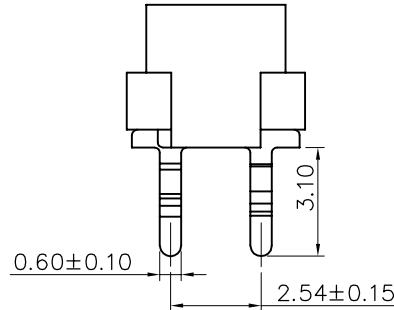
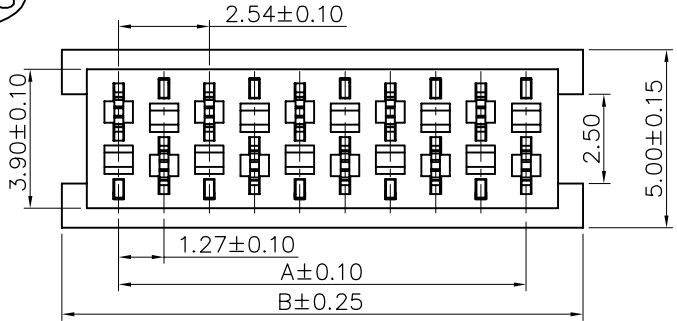
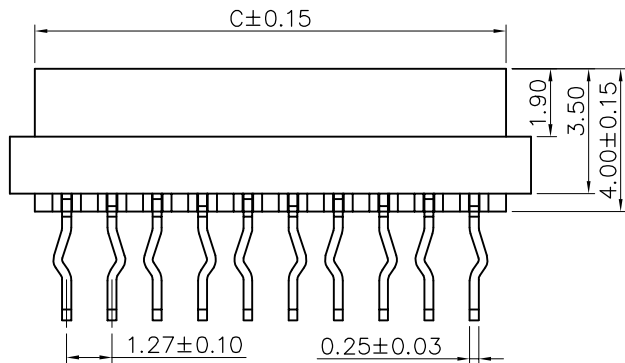
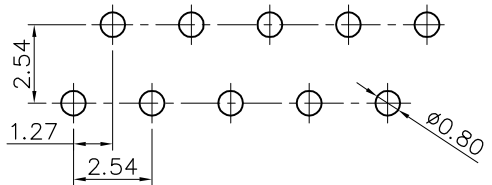






1	2	3	4	5	6	7	8																																						
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements				NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 0.5KGF/pin min 3-2.DURABILITY: 30 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 1A AC/DC RATED VOLTAGE : 500V AC/DC 4-2.CONTACT RESISTANCE: 20 mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 1000V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -40°C~+105°C. 6.PACKAGE SPEC: TUBE 7.P/N: D12752 M 0-2 XX 6 X X X SERIES NO: MALE FEMALE: M-MALE ANGLE: 9-90° 0-180° ROW NO: 2-DOUBLE ROW PIN Q'PY: 04~26 HOUSING: 1-PBT 2-PA6T 3-PA9T 4-LCP COLOR: A-BLACK K-WHITE C-RED PLATING: A-ALL AU G/F C-BRIGHE TIN D-MATTE Tin TERMIPOINT: 6-PUNCTURED TYPE																																									
RoHS    Recommended P.C.B LAYOUT(Top Side) (PCB BOARD TOLERANCE±0.05)				Ordering Information & Dimensions																																									
<table><tr><th rowspan="2">REV.</th><th rowspan="2">REVISION RECORD</th><th rowspan="2">DATE</th><th rowspan="2">GENERAL TOLERANCES</th><th rowspan="2">SCALE: 1:1</th><th rowspan="2">NAME</th><th rowspan="2">DATE</th><th rowspan="2">PART.NO: D12752M0-2XX6XXX</th><th rowspan="2">DWG.NO: ENDE05</th><th colspan="2" rowspan="2"> WanLian Teconology Co., Ltd</th></tr><tr></tr><tr><td>A0</td><td>NEW RELEASE</td><td>21.11.17</td><td>LINEAR 0.0±0.35</td><td>ANGLES X'REF±6°</td><td>APPROVED Wang_jr</td><td>21.11.17</td><td rowspan="3">TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座</td><td rowspan="3"></td><td rowspan="3">REV: A0</td><td rowspan="3">SHEET: 1/2</td></tr><tr><td></td><td></td><td></td><td>UNIT: mm</td><td>0.00±0.25</td><td>X'±3°</td><td>DESIGNER Han_Gao</td><td>21.11.17</td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X'X' ±2°</td><td>DRAWN Zijun_Huang</td><td>21.11.17</td></tr></table>				REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd		A0	NEW RELEASE	21.11.17	LINEAR 0.0±0.35	ANGLES X'REF±6°	APPROVED Wang_jr	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2				UNIT: mm	0.00±0.25	X'±3°	DESIGNER Han_Gao	21.11.17				SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN Zijun_Huang	21.11.17				
REV.	REVISION RECORD	DATE	GENERAL TOLERANCES												SCALE: 1:1	NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd																									
A0	NEW RELEASE	21.11.17	LINEAR 0.0±0.35	ANGLES X'REF±6°	APPROVED Wang_jr	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2																																			
			UNIT: mm	0.00±0.25	X'±3°	DESIGNER Han_Gao					21.11.17																																		
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN Zijun_Huang					21.11.17																																		
1	2	3	4	5	6	7	8																																						

1	2	3	4	5	6	7	8																																																														
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements				NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 0.5KGF/pin min 3-2.DURABILITY: 30 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 1A AC/DC RATED VOLTAGE : 500V AC/DC 4-2.CONTACT RESISTANCE: 20 mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 1000V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -40°C~+105°C. 6.PACKAGE SPEC: TUBE 7.P/N: D12752 M 0-2 XX 6 X X X SERIES NO: MALE FEMALE: M-MALE ANGLE: 9-90° 0-180° ROW NO: 2-DOUBLE ROW PIN Q'PY: 04~26 HOUSING: 1-PBT 2-PA6T 3-PA9T 4-LCP COLOR: A-BLACK K-WHITE C-RED PLATING: A-ALL AU G/F C-BRIGHE TIN D-MATTE Tin TERMIPOINT: 6-PUNCTURED TYPE																																																																	
RoHS 																																																																					
 Recommended P.C.B LAYOUT(Top Side) (PCB BOARD TOLERANCE±0.05)																																																																					
				Ordering Information & Dimensions																																																																	
				<table><tr><th rowspan="2">Poles</th><th colspan="3">Dimensions(mm)</th><th rowspan="2">Poles</th><th colspan="3">Dimensions(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>A</th><th>B</th><th>C</th></tr><tr><td>04</td><td>3.81</td><td>7.00</td><td>5.60</td><td>16</td><td>19.05</td><td>22.24</td><td>20.84</td></tr><tr><td>06</td><td>6.35</td><td>9.54</td><td>8.14</td><td>18</td><td>21.59</td><td>24.78</td><td>23.38</td></tr><tr><td>08</td><td>8.89</td><td>12.08</td><td>10.68</td><td>20</td><td>24.13</td><td>27.32</td><td>25.92</td></tr><tr><td>10</td><td>11.43</td><td>14.62</td><td>13.22</td><td>22</td><td>26.67</td><td>29.86</td><td>28.46</td></tr><tr><td>12</td><td>13.97</td><td>17.16</td><td>15.76</td><td>24</td><td>29.21</td><td>32.40</td><td>31.00</td></tr><tr><td>14</td><td>16.51</td><td>19.70</td><td>18.30</td><td>26</td><td>31.75</td><td>34.94</td><td>33.54</td></tr></table>				Poles	Dimensions(mm)			Poles	Dimensions(mm)			A	B	C	A	B	C	04	3.81	7.00	5.60	16	19.05	22.24	20.84	06	6.35	9.54	8.14	18	21.59	24.78	23.38	08	8.89	12.08	10.68	20	24.13	27.32	25.92	10	11.43	14.62	13.22	22	26.67	29.86	28.46	12	13.97	17.16	15.76	24	29.21	32.40	31.00	14	16.51	19.70	18.30	26	31.75	34.94	33.54
Poles	Dimensions(mm)			Poles	Dimensions(mm)																																																																
	A	B	C		A	B	C																																																														
04	3.81	7.00	5.60	16	19.05	22.24	20.84																																																														
06	6.35	9.54	8.14	18	21.59	24.78	23.38																																																														
08	8.89	12.08	10.68	20	24.13	27.32	25.92																																																														
10	11.43	14.62	13.22	22	26.67	29.86	28.46																																																														
12	13.97	17.16	15.76	24	29.21	32.40	31.00																																																														
14	16.51	19.70	18.30	26	31.75	34.94	33.54																																																														
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">PART.NO: D12752M0-2XX6XXX</td><td rowspan="4">DWG.NO: ENDE05</td><td rowspan="4"> WanLian Teconology Co., Ltd</td></tr><tr><td>AO</td><td>NEW RELEASE</td><td>21.11.17</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>21.11.17</td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X'REF±6°</td><td>DESIGNER</td><td>Han_Gao</td><td>21.11.17</td></tr><tr><td></td><td></td><td></td><td>UNIT: mm</td><td>0.00±0.25</td><td>X'±3°</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X'X' ±2°</td><td>DRAWN</td><td>Zijun_Huang</td><td>21.11.17</td><td colspan="2">TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座</td><td>REV: A0</td><td>SHEET: 1/2</td></tr></table>				REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	21.11.17				UNIT: mm	0.00±0.25	X'±3°						SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2																	
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1		NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd																																																									
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED		Wang_jr	21.11.17																																																												
				0.0±0.35	X'REF±6°	DESIGNER		Han_Gao	21.11.17																																																												
				UNIT: mm	0.00±0.25	X'±3°																																																															
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2																																																									
1	2	3	4	5	6	7	8																																																														

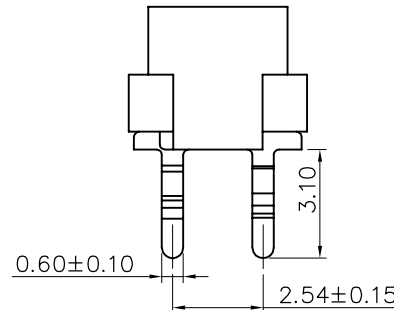

1	2	3	4	5	6	7	8																																																														
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements				NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 0.5KGF/pin min 3-2.DURABILITY: 30 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 1A AC/DC RATED VOLTAGE : 500V AC/DC 4-2.CONTACT RESISTANCE: 20 mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 1000V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -40°C~+105°C. 6.PACKAGE SPEC: TUBE 7.P/N: D12752 M 0-2 XX 6 X X X SERIES NO: MALE FEMALE: M-MALE ANGLE: 9-90° 0-180° ROW NO: 2-DOUBLE ROW PIN Q'PY: 04~26 HOUSING: 1-PBT 2-PA6T 3-PA9T 4-LCP COLOR: A-BLACK K-WHITE C-RED PLATING: A-ALL AU G/F C-BRIGHE TIN D-MATTE Tin TERMIPOINT: 6-PUNCTURED TYPE																																																																	
RoHS 																																																																					
 Recommended P.C.B LAYOUT(Top Side) (PCB BOARD TOLERANCE±0.05)																																																																					
				Ordering Information & Dimensions																																																																	
				<table><tr><th rowspan="2">Poles</th><th colspan="3">Dimensions(mm)</th><th rowspan="2">Poles</th><th colspan="3">Dimensions(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>A</th><th>B</th><th>C</th></tr><tr><td>04</td><td>3.81</td><td>7.00</td><td>5.60</td><td>16</td><td>19.05</td><td>22.24</td><td>20.84</td></tr><tr><td>06</td><td>6.35</td><td>9.54</td><td>8.14</td><td>18</td><td>21.59</td><td>24.78</td><td>23.38</td></tr><tr><td>08</td><td>8.89</td><td>12.08</td><td>10.68</td><td>20</td><td>24.13</td><td>27.32</td><td>25.92</td></tr><tr><td>10</td><td>11.43</td><td>14.62</td><td>13.22</td><td>22</td><td>26.67</td><td>29.86</td><td>28.46</td></tr><tr><td>12</td><td>13.97</td><td>17.16</td><td>15.76</td><td>24</td><td>29.21</td><td>32.40</td><td>31.00</td></tr><tr><td>14</td><td>16.51</td><td>19.70</td><td>18.30</td><td>26</td><td>31.75</td><td>34.94</td><td>33.54</td></tr></table>				Poles	Dimensions(mm)			Poles	Dimensions(mm)			A	B	C	A	B	C	04	3.81	7.00	5.60	16	19.05	22.24	20.84	06	6.35	9.54	8.14	18	21.59	24.78	23.38	08	8.89	12.08	10.68	20	24.13	27.32	25.92	10	11.43	14.62	13.22	22	26.67	29.86	28.46	12	13.97	17.16	15.76	24	29.21	32.40	31.00	14	16.51	19.70	18.30	26	31.75	34.94	33.54
Poles	Dimensions(mm)			Poles	Dimensions(mm)																																																																
	A	B	C		A	B	C																																																														
04	3.81	7.00	5.60	16	19.05	22.24	20.84																																																														
06	6.35	9.54	8.14	18	21.59	24.78	23.38																																																														
08	8.89	12.08	10.68	20	24.13	27.32	25.92																																																														
10	11.43	14.62	13.22	22	26.67	29.86	28.46																																																														
12	13.97	17.16	15.76	24	29.21	32.40	31.00																																																														
14	16.51	19.70	18.30	26	31.75	34.94	33.54																																																														
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">PART.NO: D12752M0-2XX6XXX</td><td rowspan="4">DWG.NO: ENDE05</td><td rowspan="4"> WanLian Teconology Co., Ltd</td></tr><tr><td>AO</td><td>NEW RELEASE</td><td>21.11.17</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>21.11.17</td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X'REF±6°</td><td>DESIGNER</td><td>Han_Gao</td><td>21.11.17</td></tr><tr><td></td><td></td><td></td><td>UNIT: mm</td><td>0.00±0.25</td><td>X'±3°</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X'X' ±2°</td><td>DRAWN</td><td>Zijun_Huang</td><td>21.11.17</td><td colspan="2">TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座</td><td>REV: A0</td><td>SHEET: 1/2</td></tr></table>				REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	21.11.17				UNIT: mm	0.00±0.25	X'±3°						SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2																	
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1		NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd																																																									
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED		Wang_jr	21.11.17																																																												
				0.0±0.35	X'REF±6°	DESIGNER		Han_Gao	21.11.17																																																												
				UNIT: mm	0.00±0.25	X'±3°																																																															
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2																																																									
1	2	3	4	5	6	7	8																																																														

1	2	3	4	5	6	7	8																																																														
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements				NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 0.5KGF/pin min 3-2.DURABILITY: 30 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 1A AC/DC RATED VOLTAGE : 500V AC/DC 4-2.CONTACT RESISTANCE: 20 mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 1000V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -40°C~+105°C. 6.PACKAGE SPEC: TUBE 7.P/N: D12752 M 0-2 XX 6 X X X SERIES NO: MALE FEMALE: M-MALE ANGLE: 9-90° 0-180° ROW NO: 2-DOUBLE ROW PIN Q'PY: 04~26 HOUSING: 1-PBT 2-PA6T 3-PA9T 4-LCP COLOR: A-BLACK K-WHITE C-RED PLATING: A-ALL AU G/F C-BRIGHE TIN D-MATTE Tin TERMIPOINT: 6-PUNCTURED TYPE																																																																	
RoHS 																																																																					
 Recommended P.C.B LAYOUT(Top Side) (PCB BOARD TOLERANCE±0.05)																																																																					
				Ordering Information & Dimensions																																																																	
				<table><tr><th rowspan="2">Poles</th><th colspan="3">Dimensions(mm)</th><th rowspan="2">Poles</th><th colspan="3">Dimensions(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>A</th><th>B</th><th>C</th></tr><tr><td>04</td><td>3.81</td><td>7.00</td><td>5.60</td><td>16</td><td>19.05</td><td>22.24</td><td>20.84</td></tr><tr><td>06</td><td>6.35</td><td>9.54</td><td>8.14</td><td>18</td><td>21.59</td><td>24.78</td><td>23.38</td></tr><tr><td>08</td><td>8.89</td><td>12.08</td><td>10.68</td><td>20</td><td>24.13</td><td>27.32</td><td>25.92</td></tr><tr><td>10</td><td>11.43</td><td>14.62</td><td>13.22</td><td>22</td><td>26.67</td><td>29.86</td><td>28.46</td></tr><tr><td>12</td><td>13.97</td><td>17.16</td><td>15.76</td><td>24</td><td>29.21</td><td>32.40</td><td>31.00</td></tr><tr><td>14</td><td>16.51</td><td>19.70</td><td>18.30</td><td>26</td><td>31.75</td><td>34.94</td><td>33.54</td></tr></table>				Poles	Dimensions(mm)			Poles	Dimensions(mm)			A	B	C	A	B	C	04	3.81	7.00	5.60	16	19.05	22.24	20.84	06	6.35	9.54	8.14	18	21.59	24.78	23.38	08	8.89	12.08	10.68	20	24.13	27.32	25.92	10	11.43	14.62	13.22	22	26.67	29.86	28.46	12	13.97	17.16	15.76	24	29.21	32.40	31.00	14	16.51	19.70	18.30	26	31.75	34.94	33.54
Poles	Dimensions(mm)			Poles	Dimensions(mm)																																																																
	A	B	C		A	B	C																																																														
04	3.81	7.00	5.60	16	19.05	22.24	20.84																																																														
06	6.35	9.54	8.14	18	21.59	24.78	23.38																																																														
08	8.89	12.08	10.68	20	24.13	27.32	25.92																																																														
10	11.43	14.62	13.22	22	26.67	29.86	28.46																																																														
12	13.97	17.16	15.76	24	29.21	32.40	31.00																																																														
14	16.51	19.70	18.30	26	31.75	34.94	33.54																																																														
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">PART.NO: D12752M0-2XX6XXX</td><td rowspan="4">DWG.NO: ENDE05</td><td rowspan="4"> WanLian Teconology Co., Ltd</td></tr><tr><td>AO</td><td>NEW RELEASE</td><td>21.11.17</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>21.11.17</td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X'REF±6°</td><td>DESIGNER</td><td>Han_Gao</td><td>21.11.17</td></tr><tr><td></td><td></td><td></td><td>UNIT: mm</td><td>0.00±0.25</td><td>X'±3°</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X'X' ±2°</td><td>DRAWN</td><td>Zijun_Huang</td><td>21.11.17</td><td colspan="2">TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座</td><td>REV: A0</td><td>SHEET: 1/2</td></tr></table>				REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	21.11.17				UNIT: mm	0.00±0.25	X'±3°						SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2																	
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1		NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd																																																									
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED		Wang_jr	21.11.17																																																												
				0.0±0.35	X'REF±6°	DESIGNER		Han_Gao	21.11.17																																																												
				UNIT: mm	0.00±0.25	X'±3°																																																															
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2																																																									
1	2	3	4	5	6	7	8																																																														

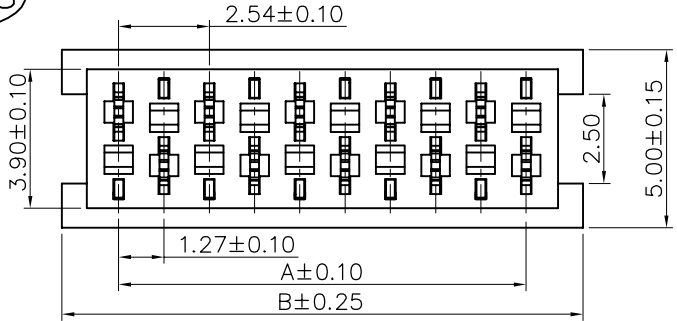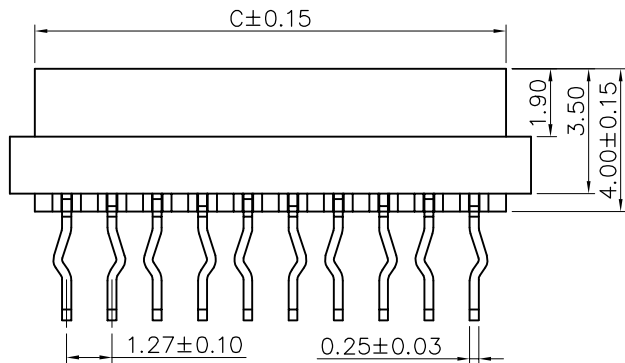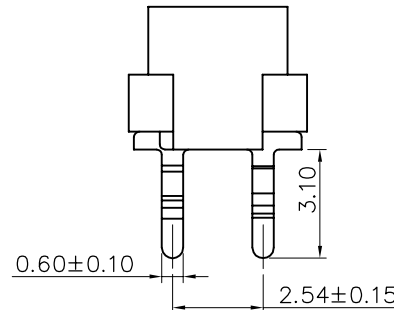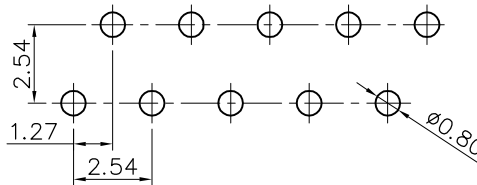1	2	3	4	5	6	7	8																																																																						
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements				NOTE: 1.MATERIAL SPECIFICATION: 1-1.HOUSING: UL94V-0 1-2.CONTACTS: BRASS 2.PLATING SPECIFICATION: 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL. 3.MECHANICAL PERFORMANCE: 3-1.RETENTIVITY FORCE: 0.5KGF/pin min 3-2.DURABILITY: 30 CYCLES. 4.ELECTRICAL PERFORMANCE: 4-1.CURRENT RATING: 1A AC/DC RATED VOLTAGE : 500V AC/DC 4-2.CONTACT RESISTANCE: 20 mΩ MAX 4-3.INSULATION RESISTANCE: 1000MΩ Min 4-4.DIELECTRIC WITHSTANDING : 1000V 5.ENVIRONMENTAL PERFORMANCE: 5-1.OPERATING TEMPERATURE: -40°C~+105°C. 6.PACKAGE SPEC: TUBE 7.P/N: D12752 M 0-2 XX 6 X X X SERIES NO: MALE FEMALE: M-MALE ANGLE: 9-90° 0-180° ROW NO: 2-DOUBLE ROW PIN Q'PY: 04~26 HOUSING: 1-PBT 2-PA6T 3-PA9T 4-LCP COLOR: A-BLACK K-WHITE C-RED PLATING: A-ALL AU G/F C-BRIGHE TIN D-MATTE Tin TERMIPOINT: 6-PUNCTURED TYPE																																																																									
RoHS 																																																																													
																																																																													
 Recommended P.C.B LAYOUT(Top Side) (PCB BOARD TOLERANCE±0.05)				<table><tr><th colspan="8">Ordering Information & Dimensions</th></tr><tr><th rowspan="2">Poles</th><th colspan="3">Dimensions(mm)</th><th rowspan="2">Poles</th><th colspan="3">Dimensions(mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>A</th><th>B</th><th>C</th></tr><tr><td>04</td><td>3.81</td><td>7.00</td><td>5.60</td><td>16</td><td>19.05</td><td>22.24</td><td>20.84</td></tr><tr><td>06</td><td>6.35</td><td>9.54</td><td>8.14</td><td>18</td><td>21.59</td><td>24.78</td><td>23.38</td></tr><tr><td>08</td><td>8.89</td><td>12.08</td><td>10.68</td><td>20</td><td>24.13</td><td>27.32</td><td>25.92</td></tr><tr><td>10</td><td>11.43</td><td>14.62</td><td>13.22</td><td>22</td><td>26.67</td><td>29.86</td><td>28.46</td></tr><tr><td>12</td><td>13.97</td><td>17.16</td><td>15.76</td><td>24</td><td>29.21</td><td>32.40</td><td>31.00</td></tr><tr><td>14</td><td>16.51</td><td>19.70</td><td>18.30</td><td>26</td><td>31.75</td><td>34.94</td><td>33.54</td></tr></table>				Ordering Information & Dimensions								Poles	Dimensions(mm)			Poles	Dimensions(mm)			A	B	C	A	B	C	04	3.81	7.00	5.60	16	19.05	22.24	20.84	06	6.35	9.54	8.14	18	21.59	24.78	23.38	08	8.89	12.08	10.68	20	24.13	27.32	25.92	10	11.43	14.62	13.22	22	26.67	29.86	28.46	12	13.97	17.16	15.76	24	29.21	32.40	31.00	14	16.51	19.70	18.30	26	31.75	34.94	33.54
Ordering Information & Dimensions																																																																													
Poles	Dimensions(mm)			Poles	Dimensions(mm)																																																																								
	A	B	C		A	B	C																																																																						
04	3.81	7.00	5.60	16	19.05	22.24	20.84																																																																						
06	6.35	9.54	8.14	18	21.59	24.78	23.38																																																																						
08	8.89	12.08	10.68	20	24.13	27.32	25.92																																																																						
10	11.43	14.62	13.22	22	26.67	29.86	28.46																																																																						
12	13.97	17.16	15.76	24	29.21	32.40	31.00																																																																						
14	16.51	19.70	18.30	26	31.75	34.94	33.54																																																																						
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">PART.NO: D12752M0-2XX6XXX</td><td rowspan="4">DWG.NO: ENDE05</td><td rowspan="4"> WanLian Teconology Co., Ltd</td></tr><tr><td>AO</td><td>NEW RELEASE</td><td>21.11.17</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>21.11.17</td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X'REF±6°</td><td>DESIGNER</td><td>Han_Gao</td><td>21.11.17</td></tr><tr><td></td><td></td><td></td><td>UNIT: mm</td><td>0.00±0.25</td><td>X'±3°</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X'X' ±2°</td><td>DRAWN</td><td>Zijun_Huang</td><td>21.11.17</td><td colspan="2">TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座</td><td>REV: A0</td><td>SHEET: 1/2</td></tr></table>				REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	21.11.17				UNIT: mm	0.00±0.25	X'±3°						SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2																									
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1		NAME	DATE	PART.NO: D12752M0-2XX6XXX	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd																																																																	
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED		Wang_jr	21.11.17																																																																				
				0.0±0.35	X'REF±6°	DESIGNER		Han_Gao	21.11.17																																																																				
				UNIT: mm	0.00±0.25	X'±3°																																																																							
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17	TITLE: Pitch 1.27mm 180° 双排 DIP IDC公座		REV: A0	SHEET: 1/2																																																																	
1	2	3	4	5	6	7	8																																																																						

1	2	3	4	5	6	7	8																																																										
The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements																																																																	
RoHS																																																																	
注意事项: 1. 管子材质: 透明硬质环保PVC 2. 厚度: 0.4mm 3. 长度: 600mm 4. 包装管两头含白色软塞 5. 管子规格: (600*8.4*6.3mm) 6. 纸箱规格: (64*11*17CM)				<table><tr><td>26P</td><td>16</td><td>3000</td></tr><tr><td>24P</td><td>17</td><td>3000</td></tr><tr><td>22P</td><td>19</td><td>4000</td></tr><tr><td>20P</td><td>21</td><td>4000</td></tr><tr><td>18P</td><td>23</td><td>5000</td></tr><tr><td>16P</td><td>26</td><td>5000</td></tr><tr><td>14P</td><td>29</td><td>5000</td></tr><tr><td>12P</td><td>33</td><td>6000</td></tr><tr><td>10P</td><td>39</td><td>7000</td></tr><tr><td>08P</td><td>48</td><td>9000</td></tr><tr><td>06P</td><td>60</td><td>11000</td></tr><tr><td>04P</td><td>82</td><td>14000</td></tr><tr><td>Pin 数</td><td>管/PCS</td><td>箱/PCS</td></tr></table>				26P	16	3000	24P	17	3000	22P	19	4000	20P	21	4000	18P	23	5000	16P	26	5000	14P	29	5000	12P	33	6000	10P	39	7000	08P	48	9000	06P	60	11000	04P	82	14000	Pin 数	管/PCS	箱/PCS																			
26P	16	3000																																																															
24P	17	3000																																																															
22P	19	4000																																																															
20P	21	4000																																																															
18P	23	5000																																																															
16P	26	5000																																																															
14P	29	5000																																																															
12P	33	6000																																																															
10P	39	7000																																																															
08P	48	9000																																																															
06P	60	11000																																																															
04P	82	14000																																																															
Pin 数	管/PCS	箱/PCS																																																															
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td>PART.NO:</td><td>DWG.NO:</td><td rowspan="4"></td></tr><tr><td>A0</td><td>NEW RELEASE</td><td>21.11.17</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>21.11.17</td><td colspan="2">D12752M0-2XX6XXX</td><td>ENDE05</td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X°REF±6°</td><td>DESIGNER</td><td>Han_Gao</td><td>21.11.17</td><td colspan="2">TITLE:</td><td></td></tr><tr><td></td><td></td><td></td><td>UNIT: mm</td><td>0.00±0.25</td><td>X°±3°</td><td>DRAWN</td><td>Zijun_Huang</td><td>21.11.17</td><td colspan="2">Pitch 1.27mm 180° 双排 DIP IDC公座 包规图</td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X°X' ±2°</td><td></td><td></td><td></td><td></td><td></td><td>REV: A0</td><td>SHEET: 2/2</td></tr></table>								REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		A0	NEW RELEASE	21.11.17	LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	D12752M0-2XX6XXX		ENDE05				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE:						UNIT: mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.11.17	Pitch 1.27mm 180° 双排 DIP IDC公座 包规图					SIZE: A4	0.000±0.10	X°X' ±2°						REV: A0	SHEET: 2/2
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:																																																							
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	D12752M0-2XX6XXX				ENDE05																																																				
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE:																																																								
				UNIT: mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.11.17	Pitch 1.27mm 180° 双排 DIP IDC公座 包规图																																																							
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: A0	SHEET: 2/2																																																					
1	2	3	4	5	6	7	8																																																										