
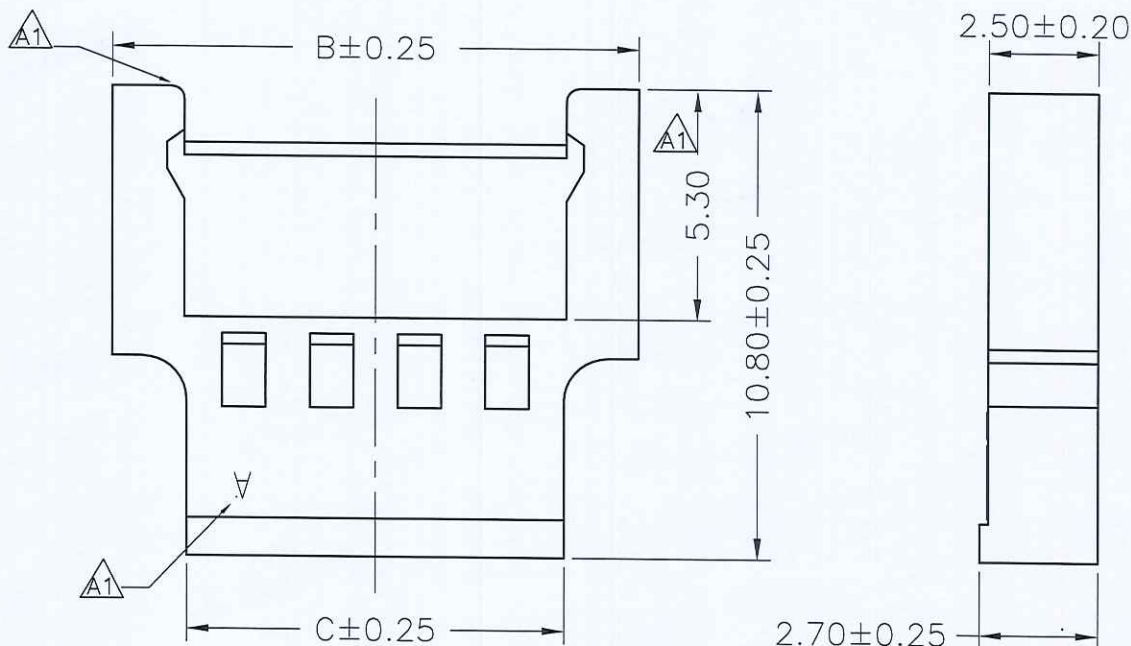


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

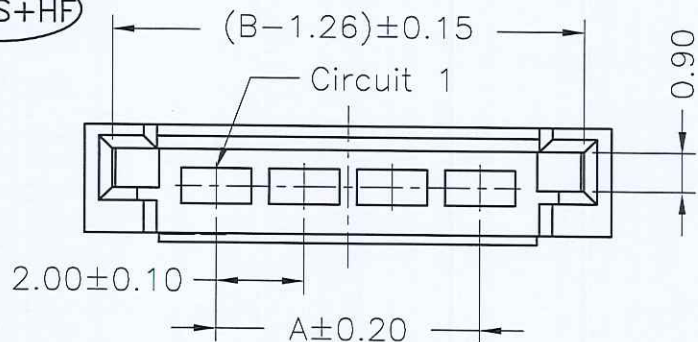

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
- 2.MECHANICAL PERFORMANCE:
2-1.RETENTIVITY FORCE: 1.2kgf/PIN MIN
2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
RATED VOLTAGE : 125V AC/DC
3-2.CONTACT RESISTANCE: 20 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC:PE BAG
- 6.P/N:

SERIES NO: C2003 H F-1 XX X 0
COLOR:
A-BLACK
S-NATURE
CONNECTOR:
H-HOUSING
MALE FEMALE:
M-MALE
PIN Q'PY:
02~13
ROW NO:
1-SINGLE ROW

Ordering Information & Dimensions

Circuit	Dimensions			Circuit	Dimensions		
	A	B	C		A	B	C
02	2.00	8.00	4.60	08	14.00	20.00	16.60
03	4.00	10.00	6.60	09	16.00	22.00	18.60
04	6.00	12.00	8.60	10	18.00	24.00	20.60
05	8.00	14.00	10.60	11	20.00	26.00	22.60
06	10.00	16.00	12.60	12	22.00	38.00	24.60
07	12.00	18.00	14.60	13	24.00	30.00	26.60

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:	WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.12		1:1			C2003HF-1XXX0	ENDE05	
A1	MODIFY THE VIEW BASED ON THE OBJECT	23.11.3	UNIT:mm	APPROVED	DESIGNER	DRAWN	TITLE:	REV: A1	SHEET: 1/1
			SIZE: A4				Pitch2.00mm 线对线单排Female Housing HF		