
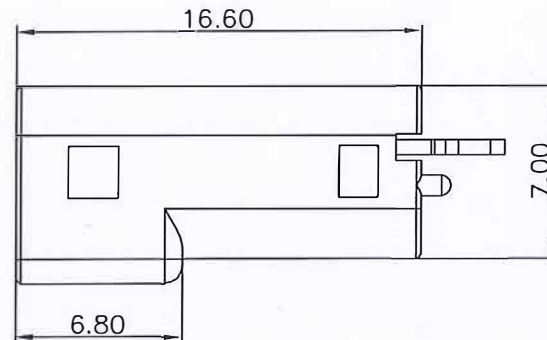
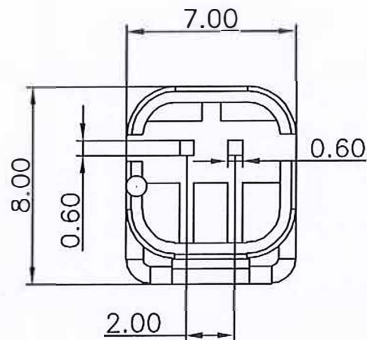



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

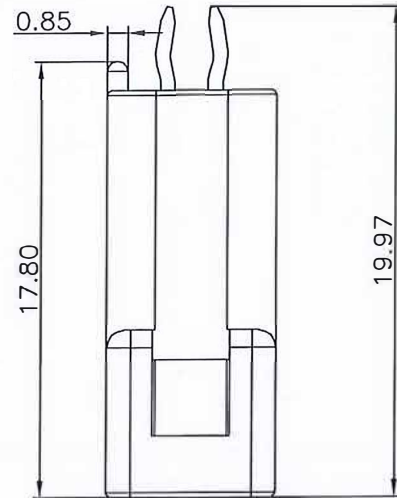

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PBT+15%G/F,UL94V-0

2.ELECTRICAL PERFORMANCE:

2-1.CURRENT RATING: 3A

RATED VOLTAGE : 100V

2-2.CONTACT RESISTANCE: 10 mΩ MAX

2-3.INSULATION RESISTANCE: 1000MΩ Min

2-4.DIELECTRIC WITHSTANDING : 1000V AC

3.ENVIRONMENTAL PERFORMANCE:

3-1.OPERATING TEMPERATURE: -25°C~+85°C.

4.PACKAGE SPEC: PE BAG

5.P/N:

C2004 W 0-1 XX 1 X X X

SERIES NO:—

CONNECTOR:
W-WAFER

ANGLE:
0-180°

ROW NO:
1-SINGLE ROW

WATERPROOF RING COLOR:

0-BLUE

1-GREEN

COLOR:

A-BLACK

K-WHITE

PLATING:

A-ALL AU G/F


C-BRIGHT TIN

TERMIPOINT:

1-DIP






PIN Q'PY:

02 PIN



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A1	ECR240830001	24.08.30		LINEAR	ANGLES	1:1			C2004W0-1XX1XXX	ENDE05	
				0.0±0.35	X'REF±6°	APPROVED	3/8/24	24.8.30			
				0.00±0.25	X'±3°	CHECK	梁林权	24.08.30			
				0.000±0.10	X'X'±2°	DRAWN	丁涛	24.08.30			
									TITLE:		
									Pitch2.00mm JWP 180° 单排带柱防水IP67 打外K Wafer		
									REV: A1	SHEET: 1/3	

RoHS

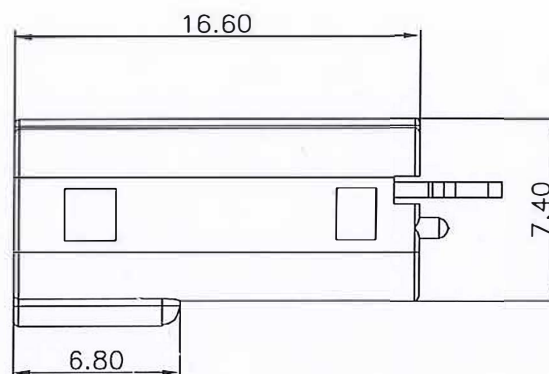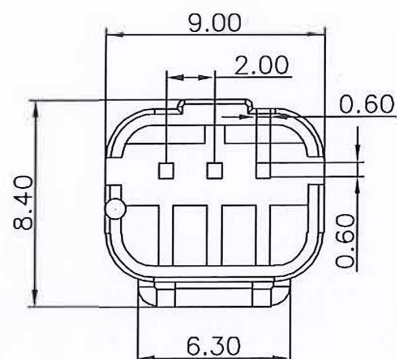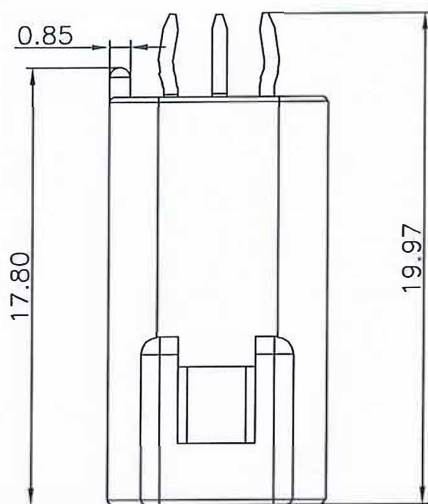

C2004 W 0-1 XX 1 X X X

ROW NO: _____
1-SINGLE ROW

C-BRIGHT TIN

03 PIN

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A1	ECR240830001	24.08.30		LINEAR	ANGLES	APPROVED	8月24日	24.8.30	C2004W0-1XX1XXX	ENDE05		
				0.0±0.35	X°REF±6°	CHECK	梁材积	24.08.30	TITLE:			
				UNIT: mm	0.00±0.25	X°±3°	DRAWN	江	24.08.30	Pitch2.00mm JWPf 180° 单排带柱防水IP67 打外K Wafer		
				SIZE: A4	0.000±0.10	X°X' ±2°						REV: A1

5 **W 万连科技**

WanLian Technology Co., Ltd

REV: A1

SHEET: 2/3

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS



NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PBT+15%G/F,UL94V-0

2.ELECTRICAL PERFORMANCE:

2-1.CURRENT RATING: 3A

RATED VOLTAGE : 100V

2-2.CONTACT RESISTANCE: 10 mΩ MAX

2-3.INSULATION RESISTANCE: 1000MΩ Min

2-4.DIELECTRIC WITHSTANDING : 1000V AC

3.ENVIRONMENTAL PERFORMANCE:

3-1.OPERATING TEMPERATURE: -25°C~+85°C.

4.PACKAGE SPEC: PE BAG

5.P/N:

C2004 W 0-1 XX 1 X X X

WATERPROOF RING COLOR:

0-BLUE

1-GREEN

COLOR:

A-BLACK

K-WHITE

PLATING:

A-ALL AU G/F

C-BRIGHT TIN

TERMIPOINT:

1-DIP

PIN Q' PY:

04 PIN

SERIES NO:

CONNECTOR:






W-WAFER

ANGLE:

0-180°

ROW NO:

1-SINGLE ROW

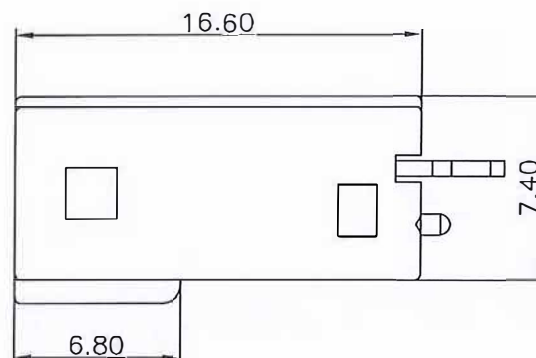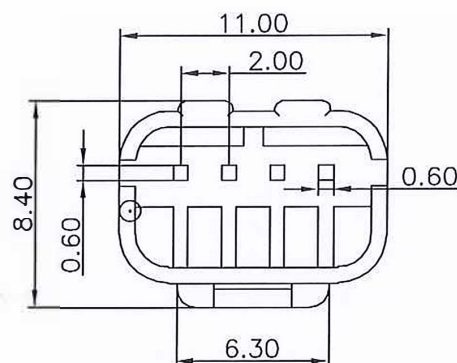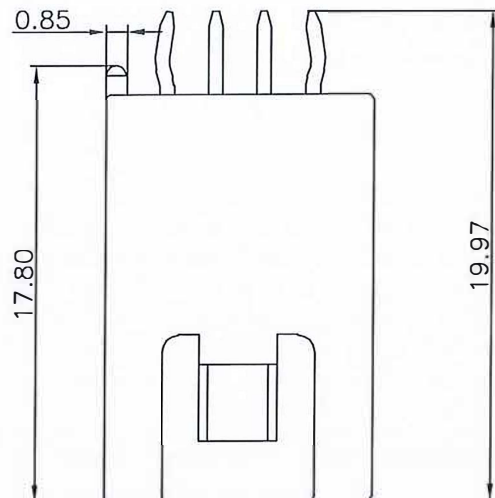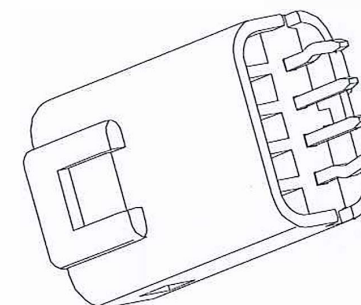

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A1	ECR240830001	24.08.30	LINEAR	ANGLES	1:1	APPROVED	24.8.30	C2004W0-1XX1XXX	ENDE05		
			0.0±0.35	X'REF±6°		CHECK	24.08.30	TITLE:		REV: A1	SHEET: 3/3
			UNIT: mm	0.00±0.25	X'±3°			Pitch2.00mm JWP 180° 单排带柱防水IP67 打外K Wafer			
			SIZE: A4	0.000±0.10	X'X'±2°	DRAWN	24.08.30				