

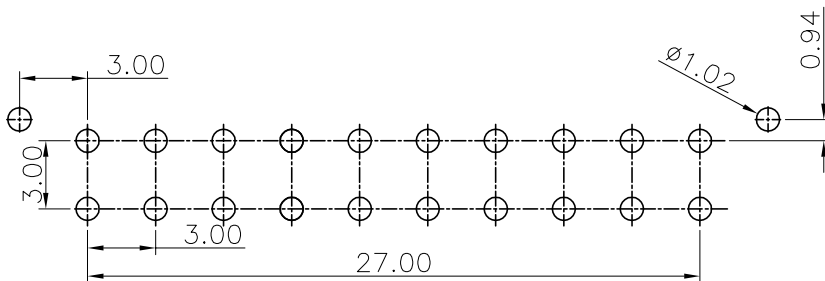
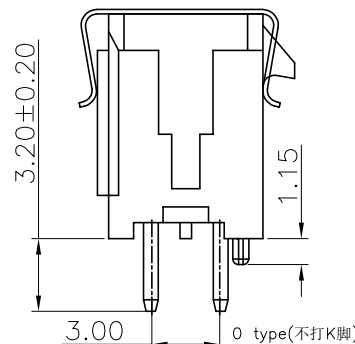
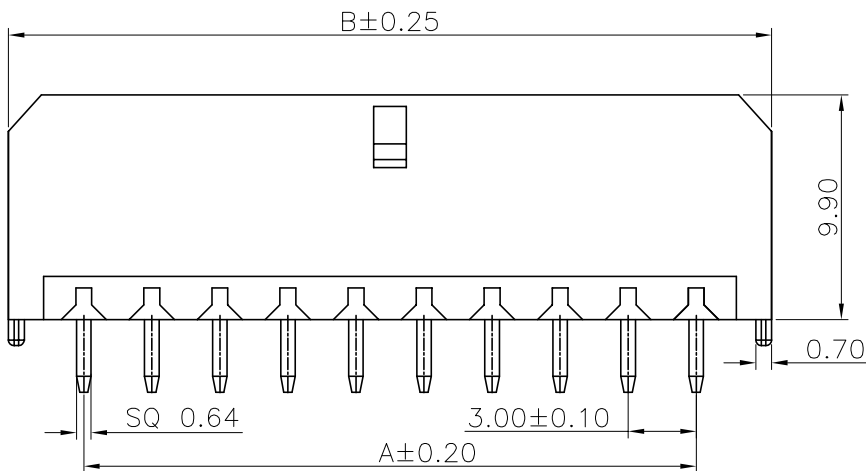



The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

RoHS+HF

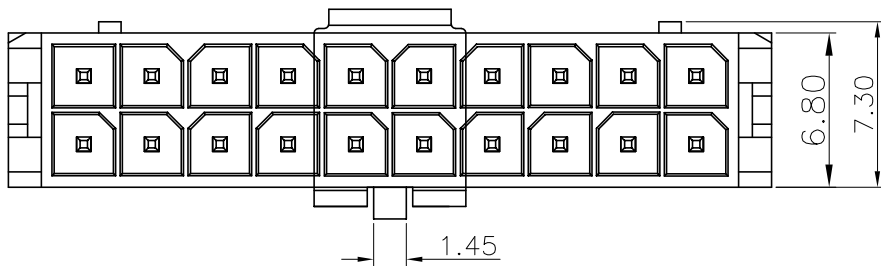

P. C. B LAYOUT

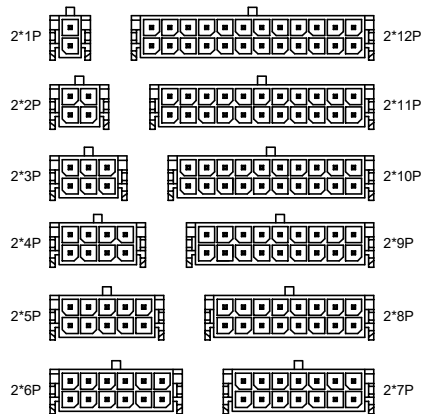

- NOTE:
- 1.MATERIAL SPECIFICATION:
1-1.HOUSING:LCP NATURE UL94V-0
1-2.CONTACTS: BRASS
 - 2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/AU PLATED OVER ALL.
 - 3.MECHANICAL PERFORMANCE:
3-1.REMOVAL FORCE: 1.0kgf MIN
 - 4.ELECTRICAL PERFORMANCE:
4-1. RATED CURRENT : 5A AC,DC
RATED VOLTAGE : 250V AC/DC
4-2.INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 10mΩ(MAX.)
4-3.WITHSTANDING VOLTAGE: 1000V AC/minute
 - 5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+105°C.
 - 6.PACKAGE SPEC: PE BAG/TRAY/REEL
 - 7.P/N:

SERIES NO: C3030 W 0-2 XX 1 X X 3
CONNECTOR: W-WAFER
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 02~24

Option:
0-NO
1-K feet
2-K feet+REEL+CAP
3-NO +REEL+CAP


COLOR:
A-BLACK
S-NATURE

PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE Tin

TERMIPOINT:
1-DIP

Ordering Information & Dimensions

Circuit	Dimensions(mm)	
	A	B
2x1P	--	6.65
2x2P	3.00	9.65
2x3P	6.00	12.65
2x4P	9.00	15.65
2x5P	12.00	18.65
2x6P	15.00	21.65
2x7P	18.00	24.65
2x8P	21.00	27.65
2x9P	24.00	30.65
2x10P	27.00	33.65
2x11P	30.00	36.65
2x12P	33.00	39.65





REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1				
A1	PART NUMBER RENEWAL	23.09.13		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	23.09.13	C3030W0-2XX1XX3	ENDE05
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Wang_jr	23.09.13	TITLE:	
			SIZE: A4	0.000±0.10	X°X°±2°	DRAWN	LX_HOU	23.09.13	3.00mm Pitch 180° Double Row Wafer	



WanLian Technology Co., Ltd
REV: A1 SHEET: 1/2

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

RoHS+HF

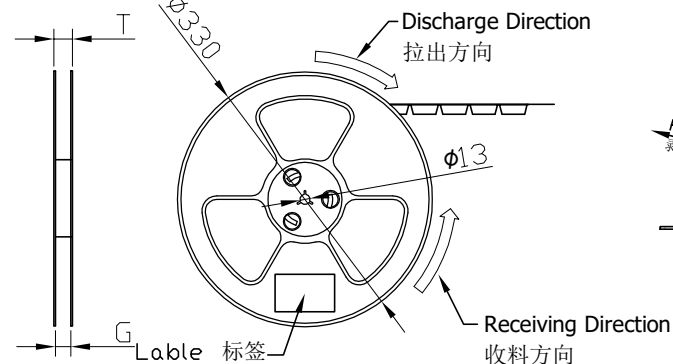
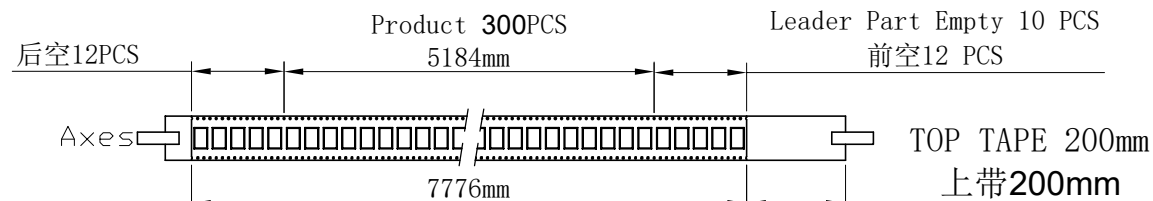


COVER TAPE PEEL STRENGTH:20~120g
上带剥离力量: 20~120g
速度 PEEL SPEED:300mm/minute

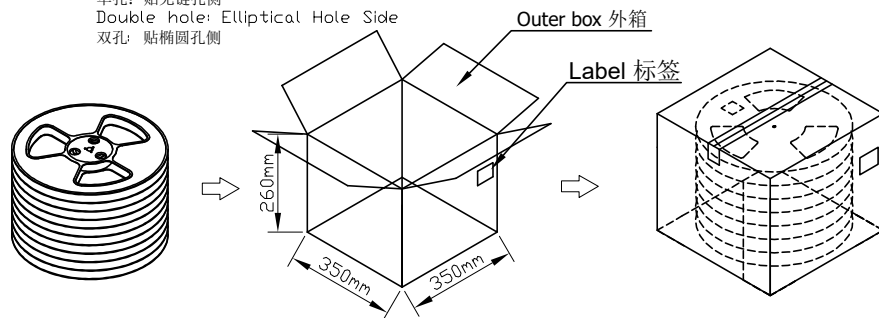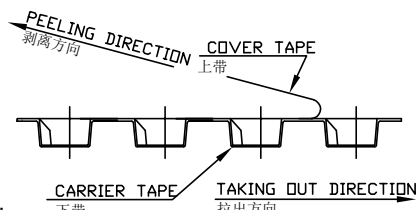

Note:

- Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance ± 0.2 MM ; 圆孔十个孔距离累计允许公差为 ± 0.2 mm
- Carrier Tape Material for PS ; 下带材质为PS材质; Color颜色: Black黑色
- bracer保护带: Color颜色:Natural透明色;厚度0.40mm最小
- Thickness=0.50 ± 0.05 ; 材料厚度为0.50 ± 0.05 mm
- Cover Tape上带: 冷风自粘带

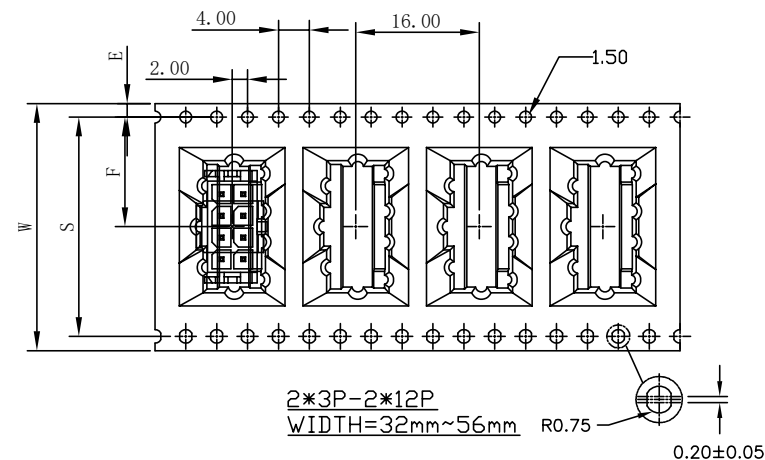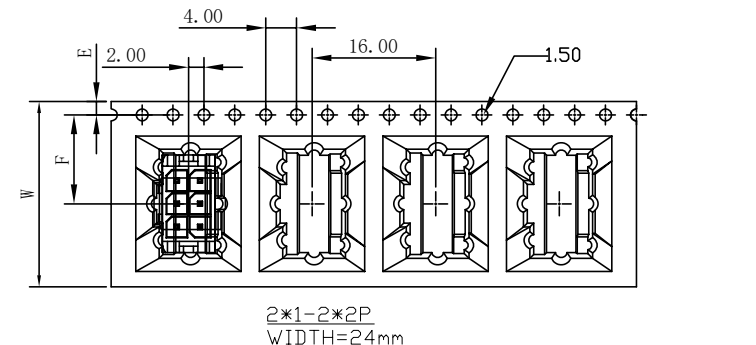

Circuit	W	S	F	T	G	Cover Tape (mm)	Carrier Tape (mm)	REEL /PCS	CARTON /R	CARTON /PCS
2*01	24	/	11.50	27.0	25.4	21.3	黑色	300	8	2400
2*02										
2*03	32	28.4	14.20	35.0	33.4	25.5		300	6	1800
2*04										
2*05										
2*06	44	40.4	20.20	48.5	44.4	37.5		300	4	1200
2*07										
2*08										
2*10										
2*11	56	52.4	26.20	60.5	56.4	49.5		300	3	900
2*12										

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.13	C3030W0-2XX1XX3	ENDE05		
A1	PART NUMBER RENEWAL	23.09.13		0.0 ± 0.35	X'REF $\pm 6^\circ$	DESIGNER	Wang_jr	23.09.13	TITLE: 3.00mm Pitch 180° Double Row Wafer REEL Packing		REV: A1	SHEET: 2/2
				0.00 ± 0.25	X' $\pm 3^\circ$	DRAWN	LX_HOU	23.09.13				
			UNIT:mm	0.00 ± 0.25	X' $\pm 3^\circ$							
			SIZE: A4	0.000 ± 0.10	X'X' $\pm 2^\circ$							