
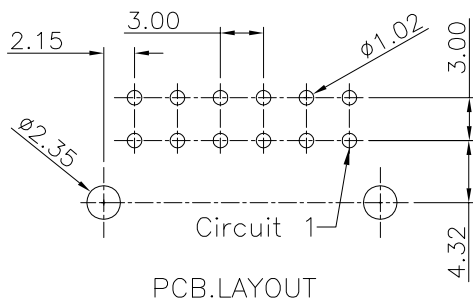

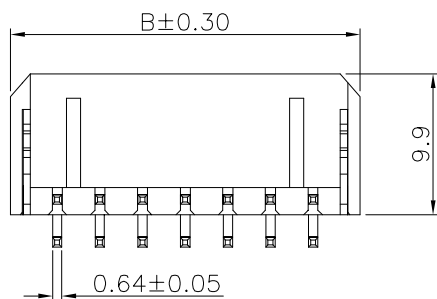



The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

RoHS+HF

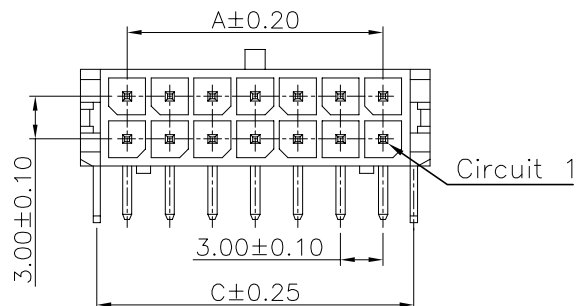

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING:LCP NATURE UL94V-0
 - 1-2.CONTACTS: BRASS
 - 1-3.Fish fork:BRASS
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
TIN/AU PLATED OVER ALL.
 - 3.MECHANICAL PERFORMANCE:
 - 3-1.REMOVAL FORCE: 1.0kgf MIN
 - 4.ELECTRICAL PERFORMANCE:
 - 4-1. RATED CURRENT : 5A AC,DC
RATED VOLTAGE : 250V AC/DC
 - 4-2.INSULATION RESISTANCE: 00mΩ MIN
CONTACT RESISTANCE : 10mΩ(MAX.)
 - 4-3.WITHSTANDING VOLTAGE: 1000V AC/minute
 - 5.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+105°C.
 - 6.PACKAGE SPEC:PE BAG/TRAY
- △ C3030 W 9 1-2 XX 1 X X 0
- SERIES NO: _____
- CONNECTOR: _____
- W-WAFER
- ANGLE: _____
- 9-90°
- TYPE: _____
- 1-TYPE 1
- ROW NO: _____
- 2-DOUBLE ROW
- COLOR:
A-BLACK
S-NATURE
- PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin
- TERMIPOINT:
1-DIP
- PIN Q'PY:
02~24

Ordering Information & Dimensions

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
2*01	--	6.65	4.30	2*07	18.00	24.65	22.30
2*02	3.00	9.65	7.30	2*08	21.00	27.65	25.30
2*03	6.00	12.65	10.30	2*09	24.00	30.65	28.30
2*04	9.00	15.65	13.30	2*10	27.00	33.65	31.30
2*05	12.00	18.65	16.30	2*11	30.00	36.65	34.30
2*06	15.00	21.65	19.30	2*12	33.00	39.65	37.30

REV.	REVISION RECORD	DATE	SCALE: 1:1	GENERAL TOLERANCES		NAME	DATE	PART.NO: C3030W91-2XX1XX0	DWG.NO: ENDE05	TITLE: 3.00mm Pitch 90° Double Row Wafer	REV: A1	SHEET: 1/1
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.13				
A1	PART NUMBER RENEWAL	23.09.13		0.0±0.35	X°REF±6°	DESIGNER	Wang_jr	23.09.13				
				0.00±0.25	X°±3°							
				UNIT:mm	X°X'±2°	DRAWN	LX_HOU	23.09.13				
				SIZE: A4	0.000±0.10							

WanLian Technology Co., Ltd