


	1	2	3	4	5	6	7	8
A	The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements							RoHS
B								
C								
D								
E								
F								
G								
H								

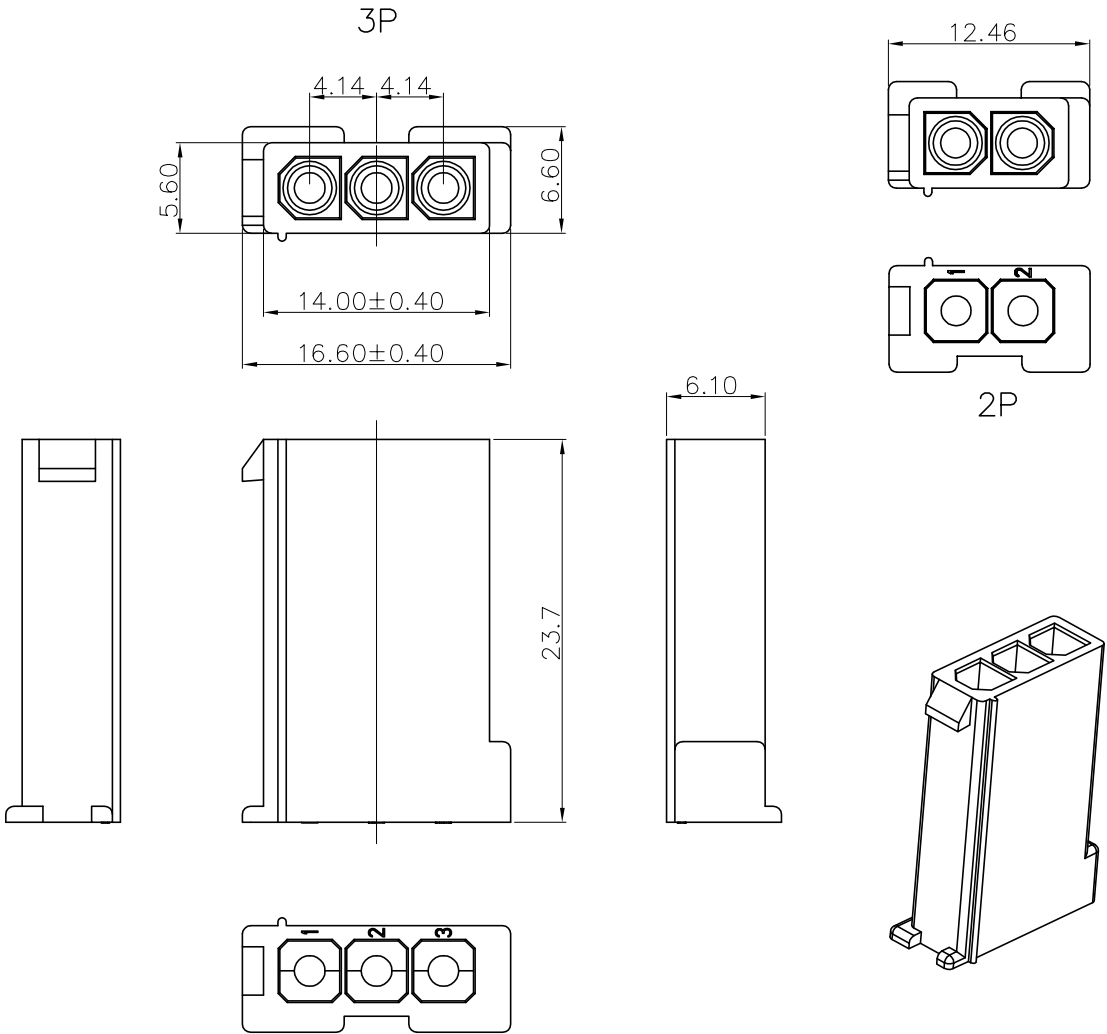

NOTE:

1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66

2.ELECTRICAL PERFORMANCE:
2-1.CURRENT RATING: 7A
RATED VOLTAGE : 600V
2-2.CONTACT RESISTANCE: 20 mΩ MAX
2-3.INSULATION RESISTANCE: 1000MΩ Min
2-4.DIELECTRIC WITHSTANDING : 1500V AC

3.ENVIRONMENTAL PERFORMANCE:
3-1.OPERATING TEMPERATURE: -25℃~+85℃.

4.PACKAGE SPECPE BAG

5.P/N:

C4140

H

F-1

XX

X

X

HOUSING:
0-UL94V-0

COLOR:
A-BLACK
S-NATURE

PIN Q'PY:
02~03

SERIES NO: _____

CONNECTOR: _____

H-HOUSING

MALE FEMALE: _____

M-MALE

F-FEMALE

ROW NO: _____

1-SINGLE ROW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C4140HF-1XXXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	TITLE: Pitch 4.14mm Female 单排 Housing			
				0.0±0.35	X°REF±6°		DESIGNER	Han_Gao		21.11.17		
				UNIT: mm	0.00±0.25	X°±3°		DRAWN		Zijun_Huang		21.11.17
				SIZE: A4	0.000±0.10	X°X' ±2°						
										REV: A0	SHEET: 1/1	