
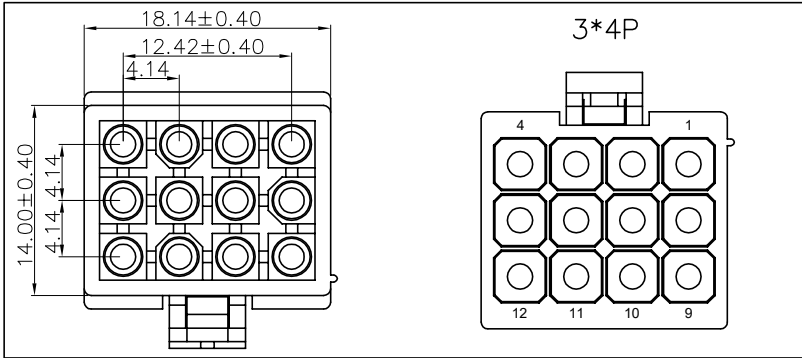



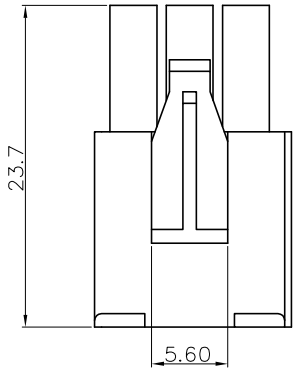
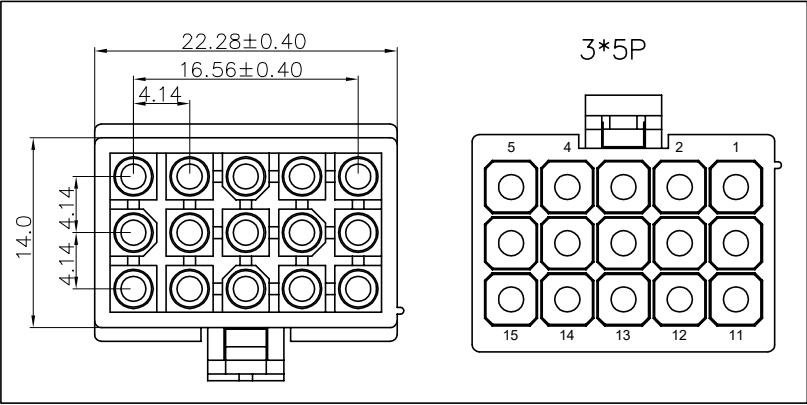


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

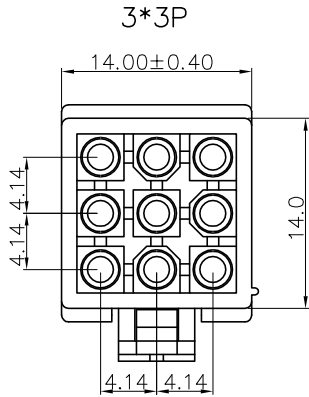

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66
2.ELECTRICAL PERFORMANCE:
2-1.CURRENT RATING: 7A
RATED VOLTAGE : 600V
2-2.CONTACT RESISTANCE: 20 mΩ MAX
2-3.INSULATION RESISTANCE: 1000MΩ Min
2-4.DIELECTRIC WITHSTANDING : 1500V AC
3.ENVIRONMENTAL PERFORMANCE:
3-1.OPERATING TEMPERATURE: -25℃~+85℃.
4.PACKAGE SPECPE BAG
5.P/N:
C4140 H M-3 XX X X
SERIES NO: _____ HOUSING:
O-UL94V-0
CONNECTOR: _____
H-HOUSING
MALE FEMALE: _____
M-MALE
F-FEMALE
COLOR:
A-BLACK
S-NATURE
ROW NO: _____
3-THREE ROWS
PIN Q'PY:
09~05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1				ENDE05		
			UNIT: mm	0.0±0.35	X*REF±6°	APPROVED	Wang_jr	21.11.17	C4140HM-3XXXX		Pitch 4.14mm Male 三排 Housing	
				0.00±0.25	X*±3°	DESIGNER	Han_Gao	21.11.17				
				0.000±0.10	X*X° ±2°	DRAWN	Zijun_Huang	21.11.17				