


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

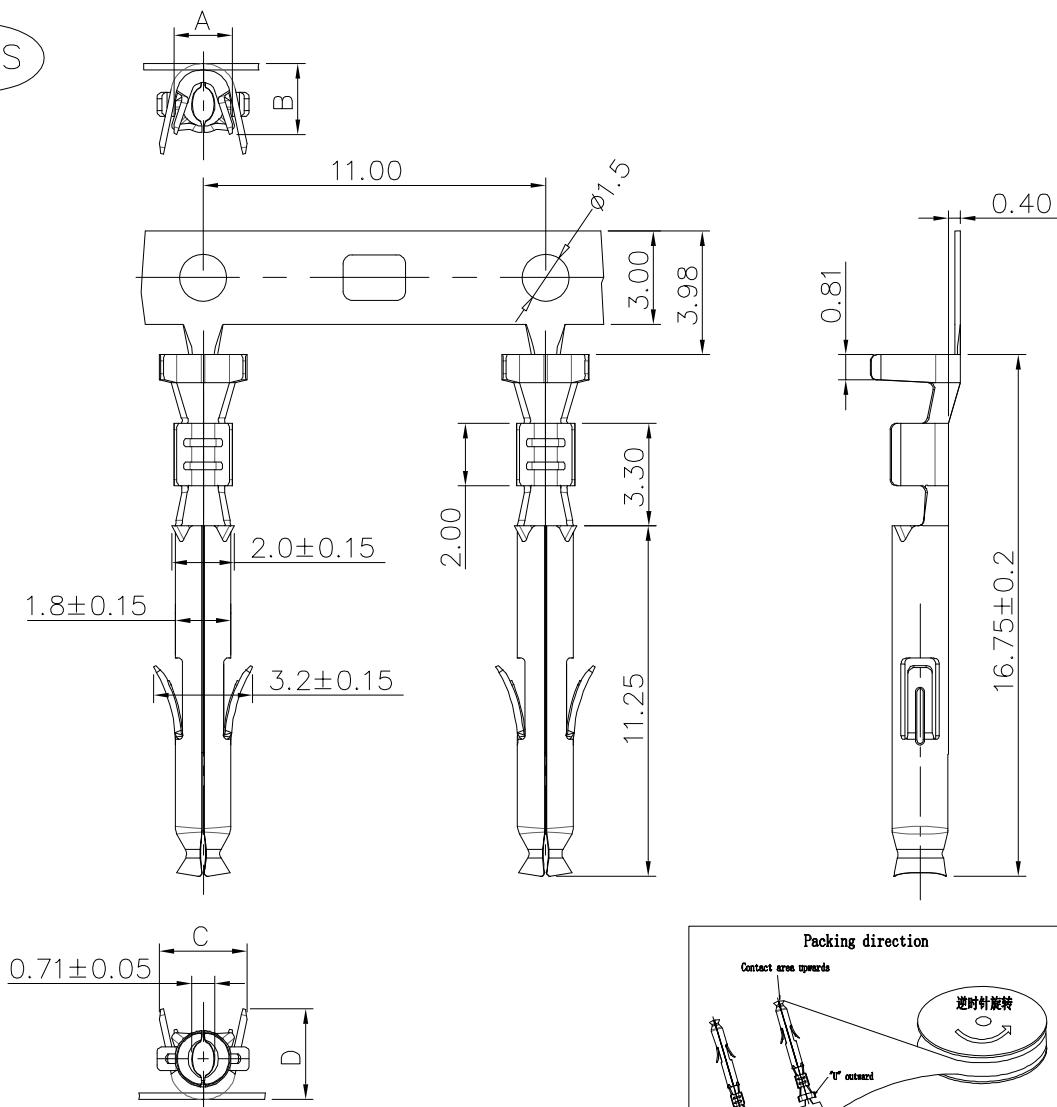

NOTE:

1.MATERIAL SPECIFICATION:

1-1.TERMINAL: PHOSPHOR BRONZE /BRASS

2.PLATING SPECIFICATION:

2-1.TERMINAL:

TIN/GOLD FLASH PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 7A

RATED VOLTAGE : 600V

3-2.CONTACT RESISTANCE: 20 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 1500V AC


4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -25°C~+85°C.

5.PACKAGE SPEC :

6.P/N:

SERIES NO: C4140 T X F X-X  
CONNECTOR: T  
TYPE: 1-TYPE1  
PLATING: C-BRIGHT TIN  
METAL: P-PHOSPHOR BRONZE  
B-BRASS  
MALE FEMALE: F-FEMALE  
M-MALE

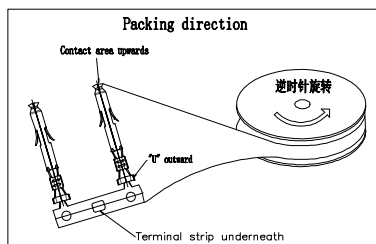

TABLE

TYPE1	1.92	1.83	2.77	2.92	SN 100U"	24AWG, 22AWG	1.20~1.75
TYPE	DIM A	DIM B	DIM C	DIM D	FINISH	WIRE DIAMETER	O.D

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	万连科技 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	Wang_jr	21.11.17	C4140TXFX-X	ENDE05		
			0.0±0.35	X*REF±6°		DESIGNER	Han_Gao	21.11.17	TITLE:	REV: A0	SHEET: 1/1
			UNIT: mm	0.00±0.25	X*±3°		DRAWN	Zijun_Huang	21.11.17		
			SIZE: A4	0.000±0.10	X*X' ±2°						