

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PA66

2.ELECTRICAL PERFORMANCE:

2-1.CURRENT RATING: 9A

RATED VOLTAGE : 600V AC/DC

2-2.CONTACT RESISTANCE: 20 mΩ MAX

2-3.INSULATION RESISTANCE: 1000MΩ Min

2-4.DIELECTRIC WITHSTANDING : 1500V

3.ENVIRONMENTAL PERFORMANCE:

3-1.OPERATING TEMPERATURE: -25°C~+85°C.

4.PACKAGE SPEC: PE BAG

5.P/N:

C4201 H M-2 XX X X-MR

SERIES NO:

CONNECTOR:

H-HOUSING

MALE FEMALE:

M-MALE

ROW NO:

2-DOUBLE ROW

PIN Q'PY:

02~24

SPECIAL REQUIREMENT

HOUSING:

0-UL94V-0

COLOR:

A-BLACK

G-BLUE

S-NATURE

备注：各PIN位的侧视图、顶部视图看2/3、3/3页

Circuit	Dimensions (mm)		Circuit	Dimensions (mm)	
	A	B		A	B
2*01	---	5.70	2*07	25.20	30.60
2*02	4.20	9.90	2*08	29.40	34.80
2*03	8.40	13.80	2*09	33.60	39.00
2*04	12.60	18.00	2*10	37.80	43.20
2*05	16.80	22.20	2*11	42.00	47.40
2*06	21.00	26.40	2*12	46.20	51.60

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
				LINEAR	ANGLES						
A0	NEW RELEASE	22.03.19		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	22.03.19	C4201HM-2XXXX-MR	ENDE05	
				0.00±0.25	X°±3°	CHECK	XueZe_Ma	22.03.19	TITLE: Pitch 4.2mm Male 双排 Housing		
				0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.03.19			

UNIT: mm

SIZE: A4

WanLian Technology Co., Ltd

REV: A0

SHEET: 1/3

1

2

3


4

5

6

7

8

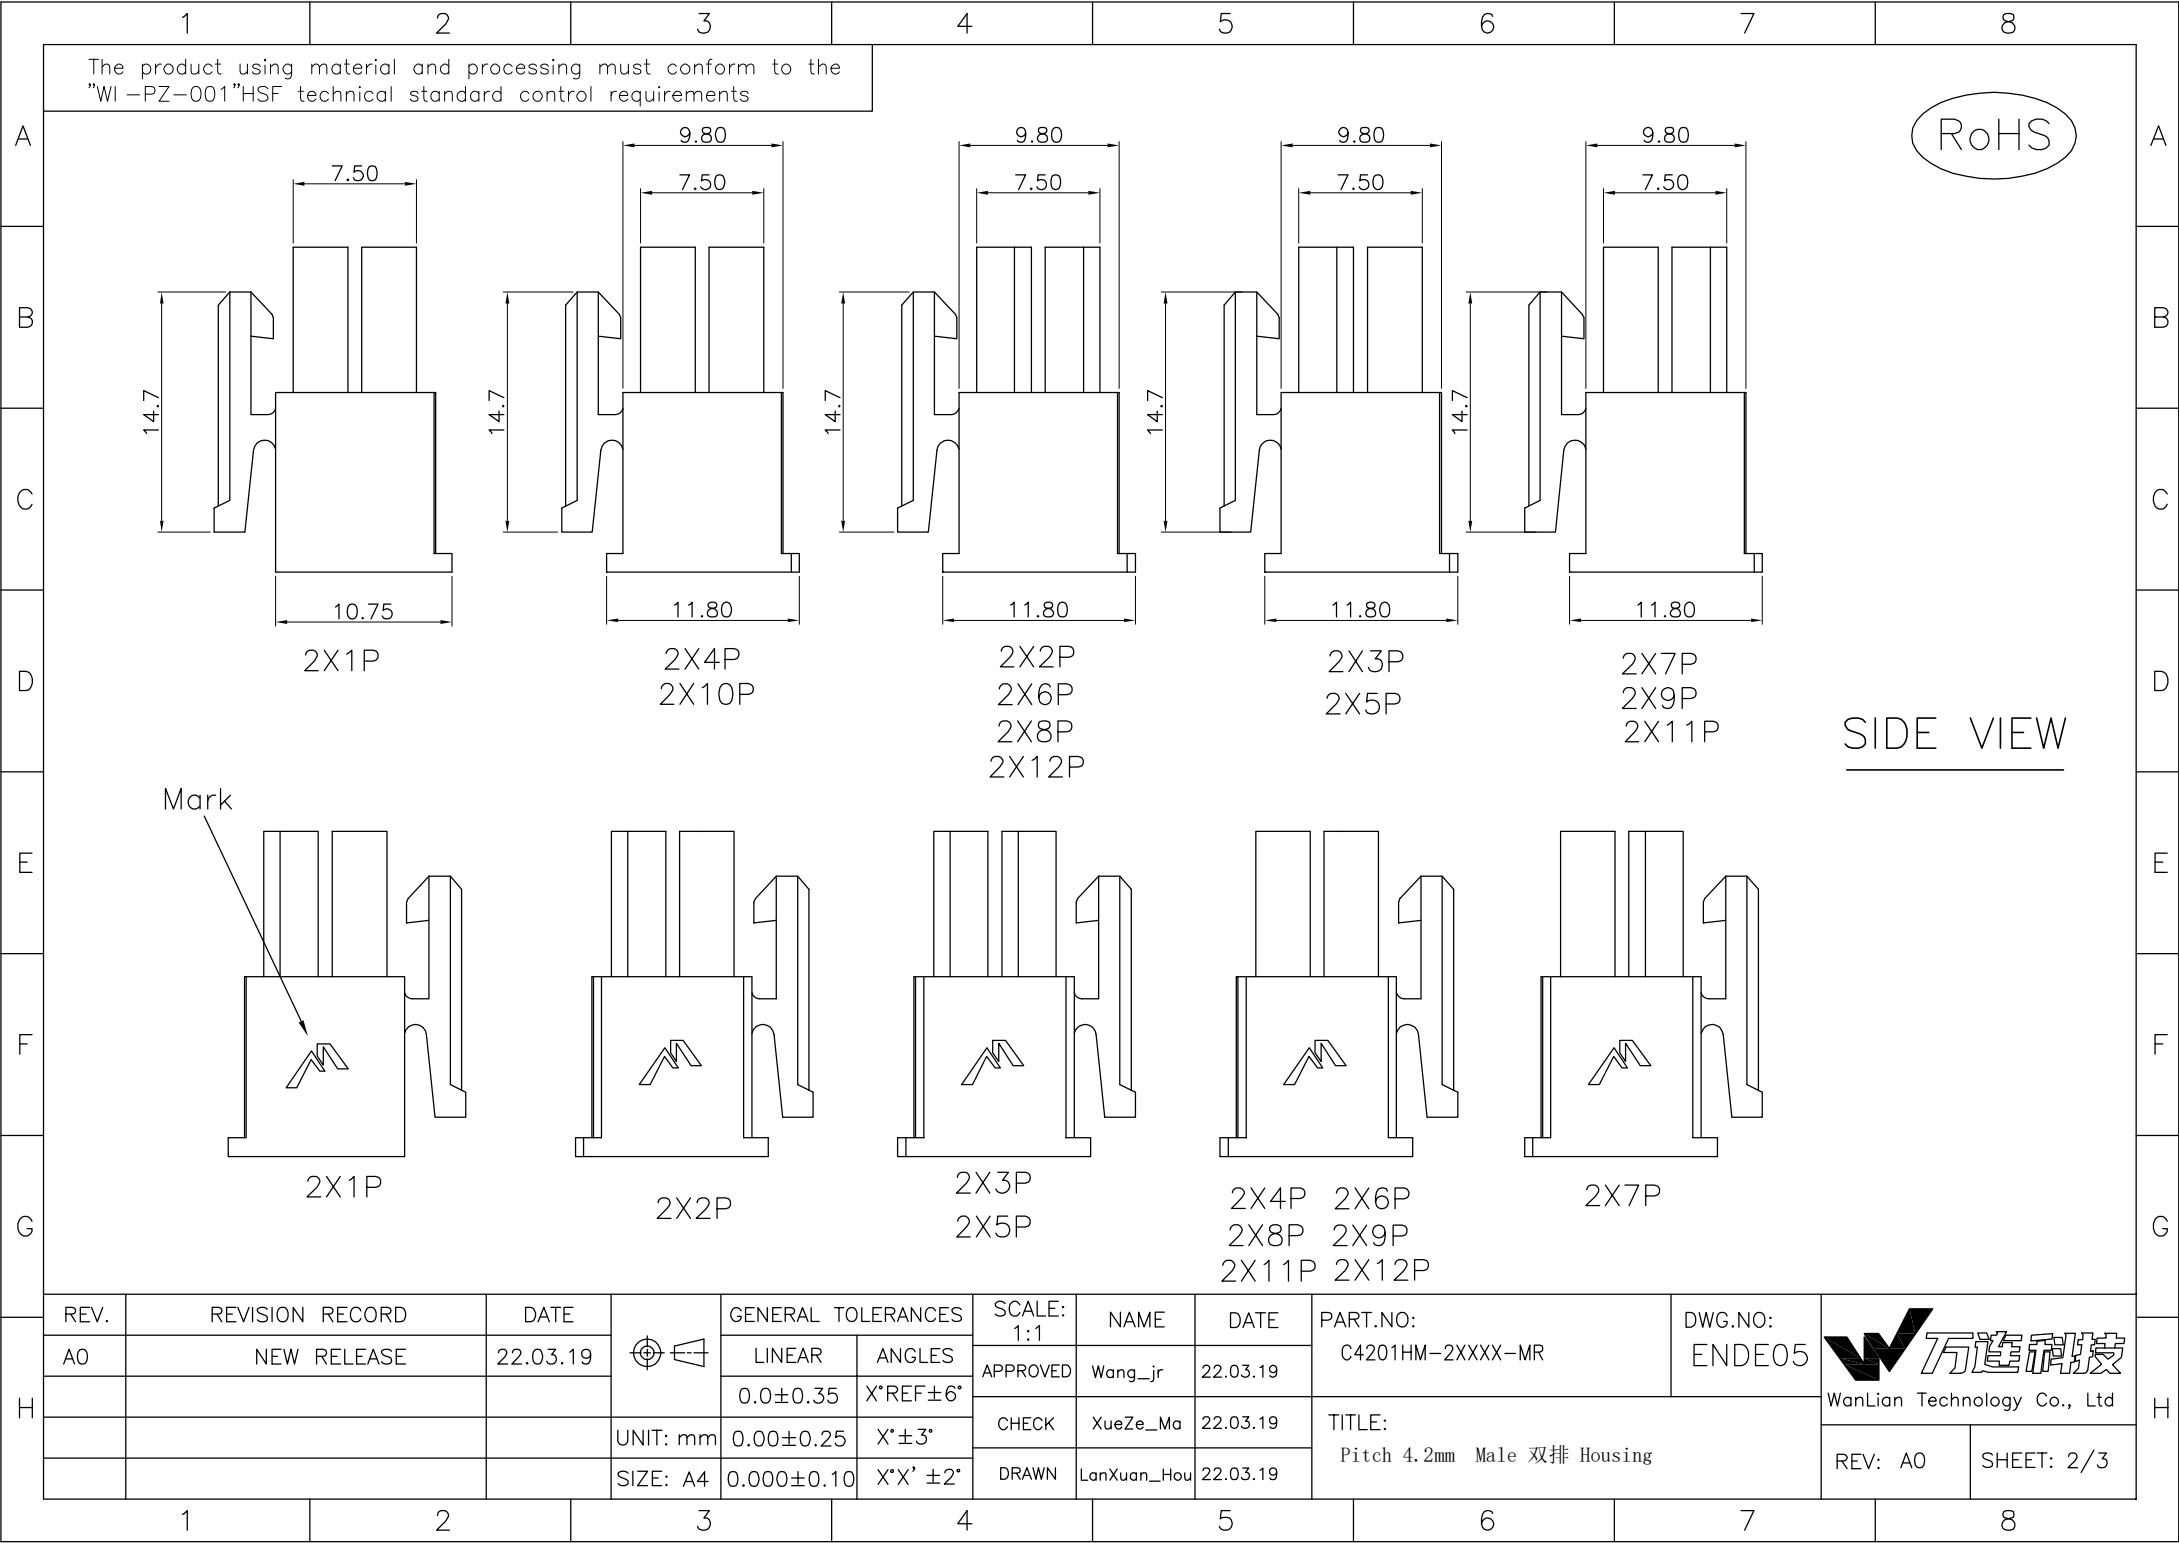


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

SIDE VIEW

Mark

WanLian Technology Co., Ltd

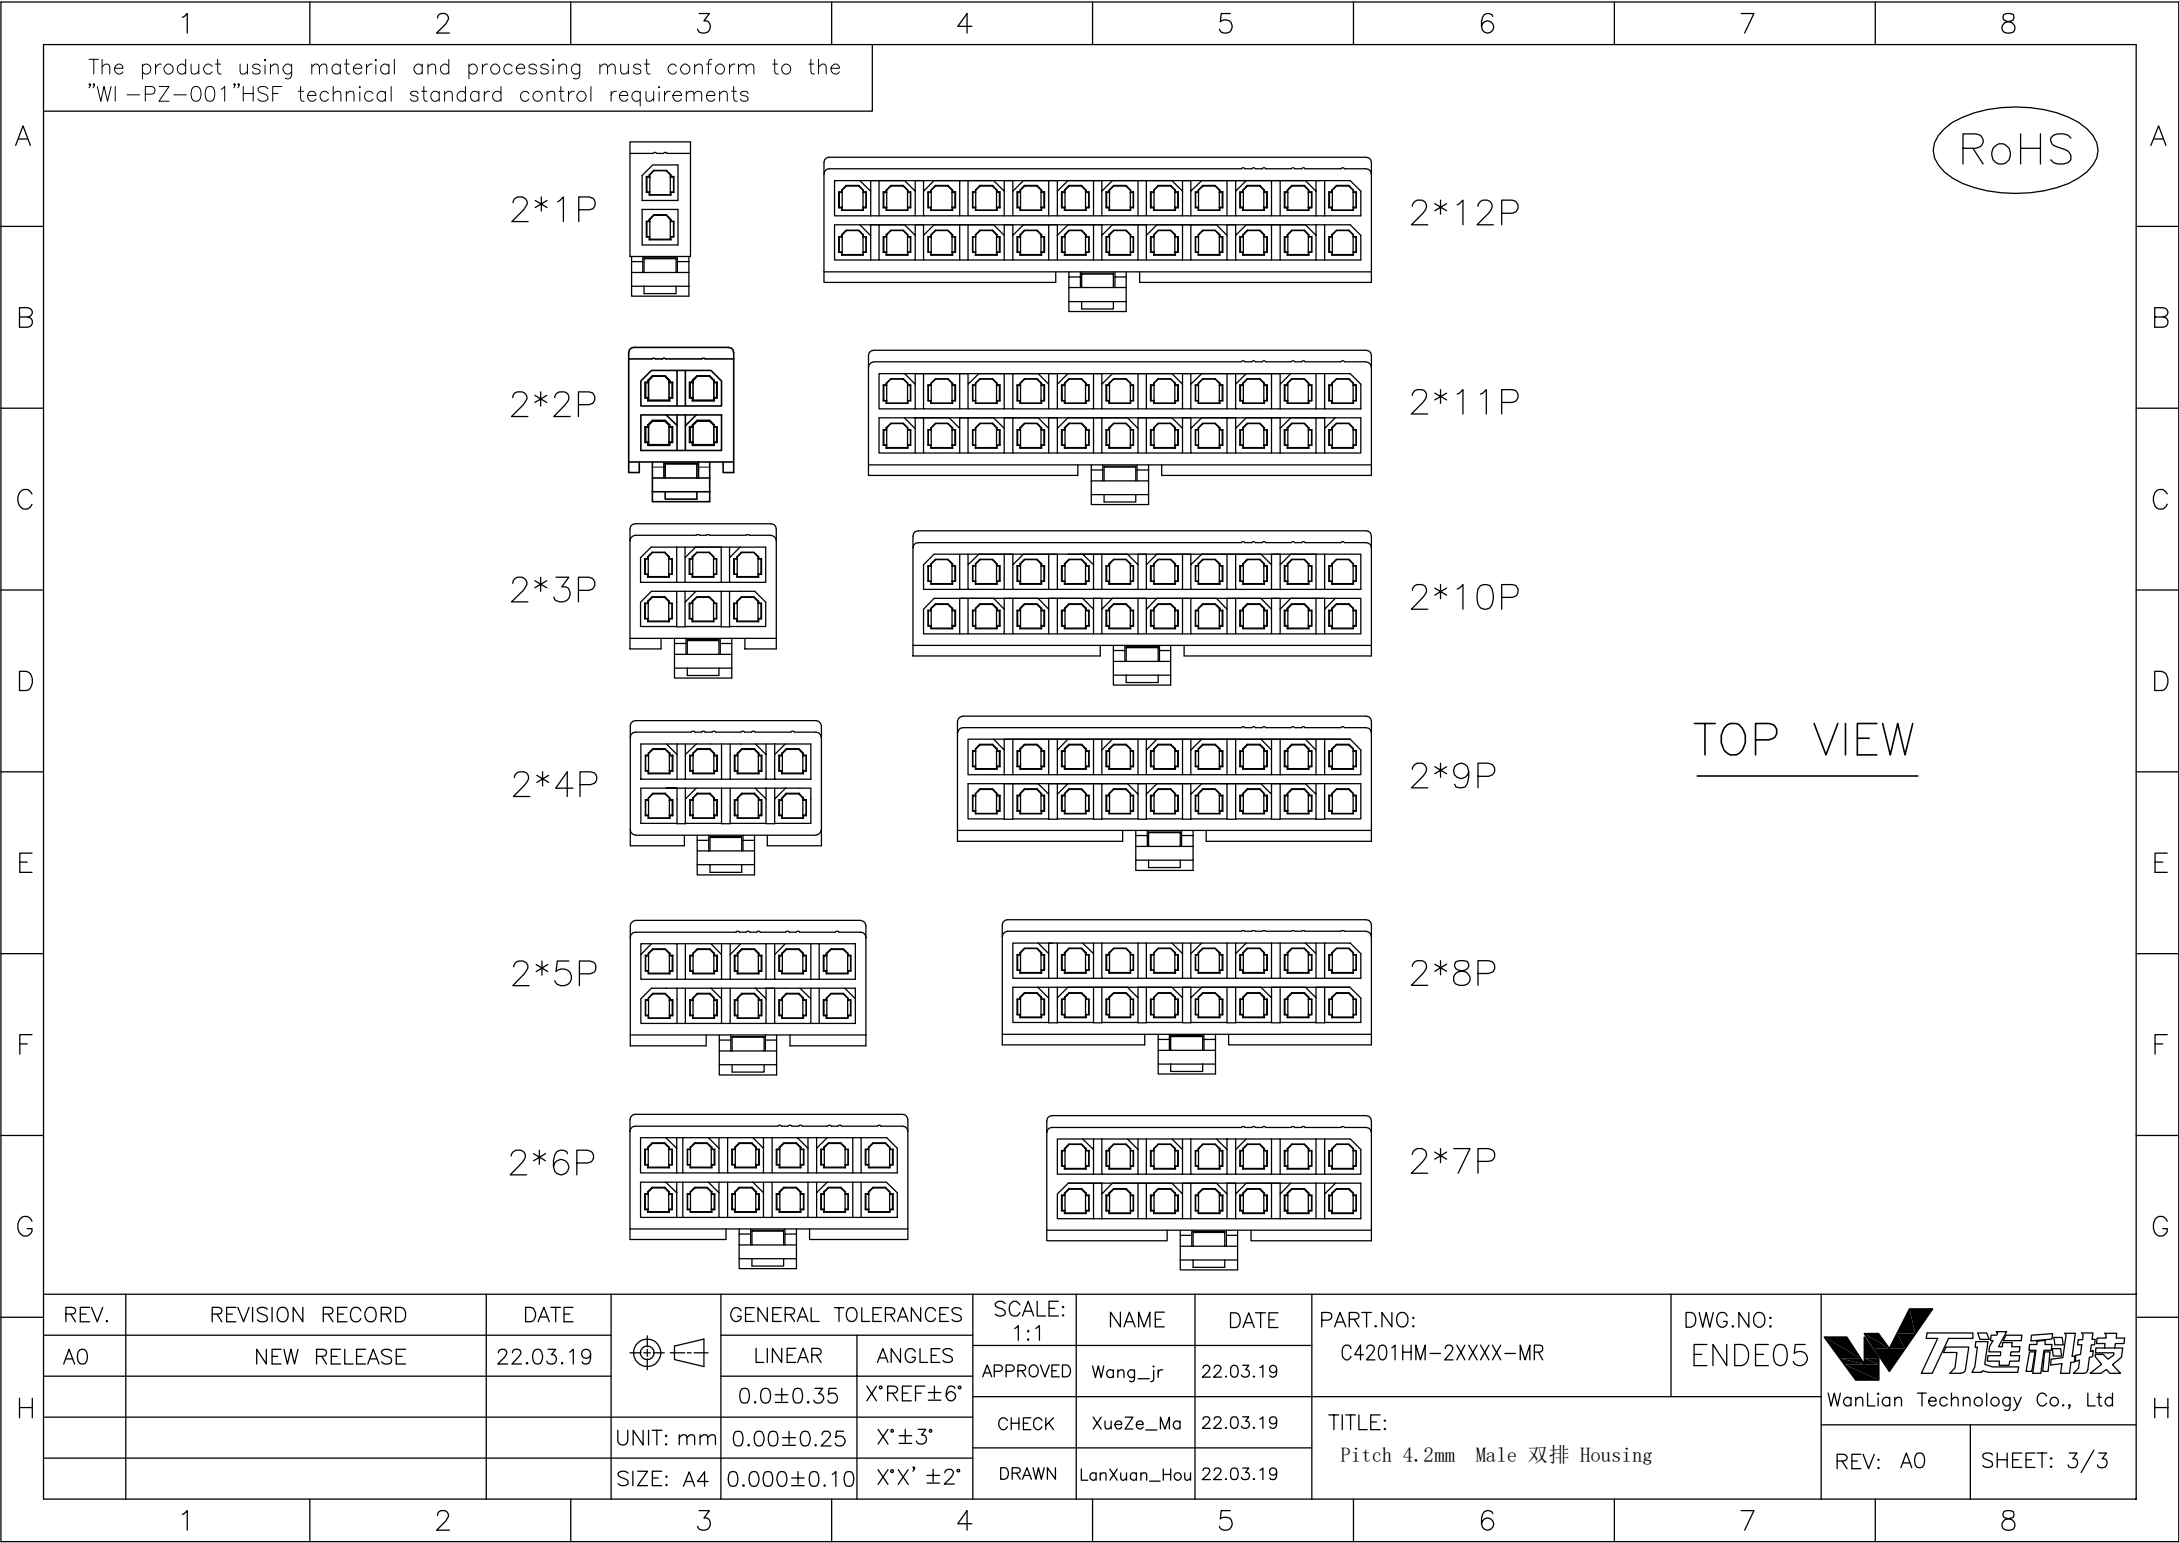

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

TOP VIEW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C4201HM-2XXXX-MR	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19				
				0.0±0.35	X°REF±6°							
				UNIT: mm	0.00±0.25	X°±3°	CHECK	XueZe_Ma	22.03.19	TITLE: Pitch 4.2mm Male 双排 Housing		
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.03.19			
											REV: A0	SHEET: 3/3