

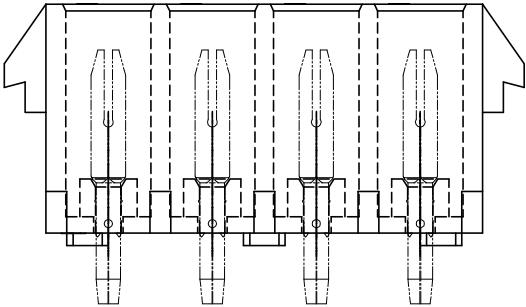
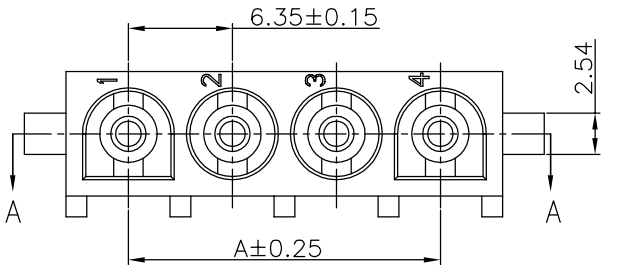
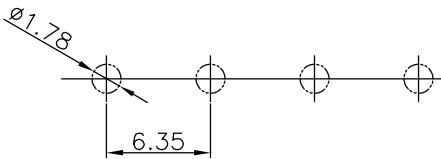
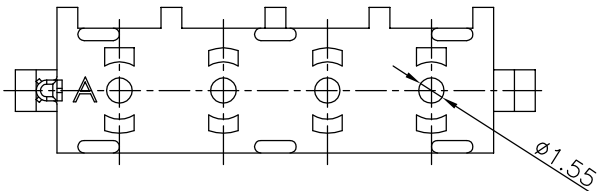


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

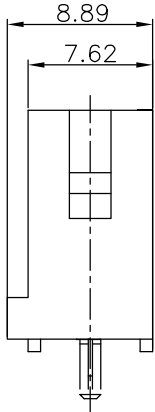

SECTION:A-A

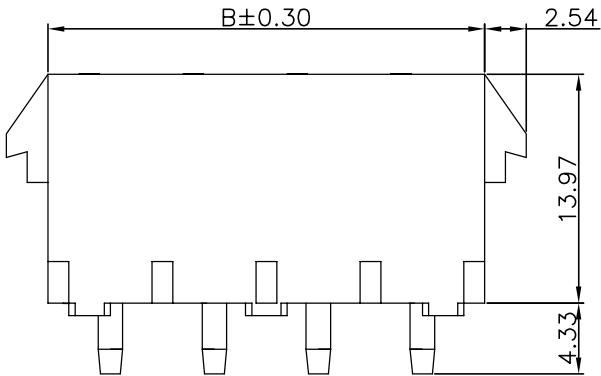

P.C.B LAYOUT

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 15A
RATED VOLTAGE : 600V
3-2.CONTACT RESISTANCE: 3.5 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 5000V AC
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.MATES WITH C6351 SERIES MALE HOUSING
6.PACKAGE SPEC: PE BAG
7.P/N:
C6351 W 0 2-1 XX 1 X X X
SERIES NO: HOUSING:
0-UL94V-0
2-UL94V-2
CONNECTOR: W-WAFER
ANGLE: 0-180°
TYPE: 2-TYPE 2
ROW NO: 1-SINGLE ROW
PIN Q'PY: 02~06
TERMIPOINT: 1-DIP
COLOR: S-NATURE
PLATING: C-BRIGHE TIN

Circuit No.	Dimensions	
	A	B
02P	6.35	13.97
03P	12.70	20.32
04P	19.05	26.67
05P	25.40	33.02
06P	31.75	39.37

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C6351W02-1XX1XXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19			
				0.0±0.35	X°REF±6°						
				UNIT:mm	0.00±0.25	X°±3°	CHECK	XueZe_Ma	22.03.19	TITLE: Pitch 6.35mm 单排 公座 无柱	
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.03.19	REV: A0		SHEET: 1/1