
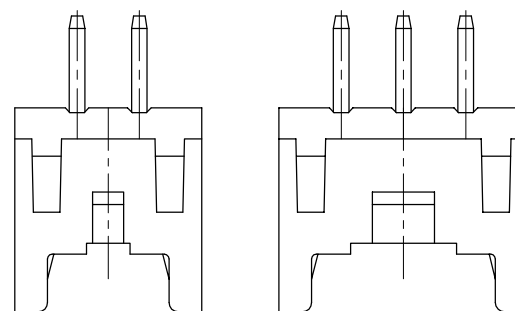
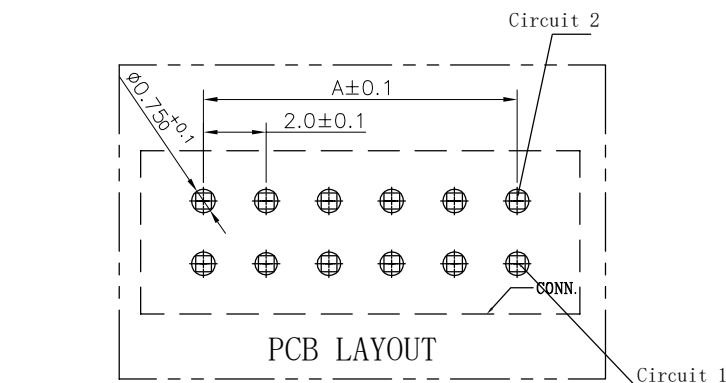
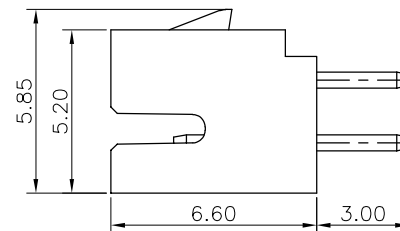
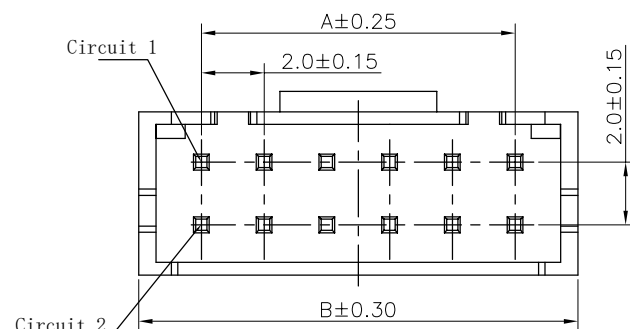
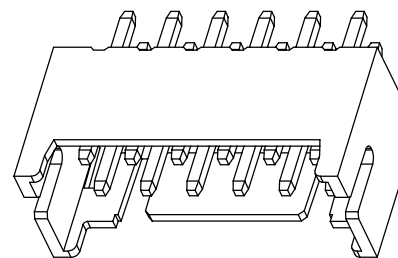


$$(RoHS+HF)$$

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A AC/DC
 - 3-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 800V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

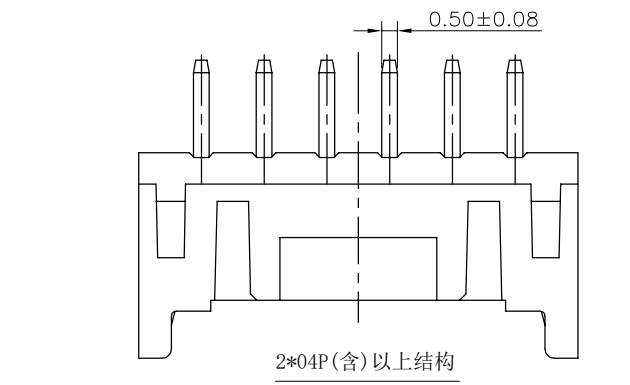

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
2*02	---	6.00	2*12	22.00	26.00
2*03	4.00	8.00	2*13	24.00	28.00
2*04	6.00	10.00	2*14	26.00	30.00
2*05	8.00	12.00	2*15	28.00	32.00
2*06	10.00	14.00	2*16	30.00	34.00
2*07	12.00	16.00	2*17	32.00	36.00
2*08	14.00	18.00	2*18	34.00	38.00
2*09	16.00	20.00	2*19	36.00	40.00
2*10	18.00	22.00	2*20	38.00	42.00
2*11	20.00	24.00			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2006W01-2XX1XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	22.10.28 <th>LINEAR</th> <th>ANGLES</th> <td>APPROVED</td> <td>Wang_jr</td> <td>23.9.19</td> <td></td> <td></td>		LINEAR	ANGLES	APPROVED	Wang_jr	23.9.19				
A1	PART NUMBER RENEWAL	23.09.19		0.0±0.35	X*REF±6°	DESIGNER	Han_Gao	23.9.19	TITLE: Pitch 2.0mm 180°PHD双排立插带扣 Wafer无卤			
A2	ADD 2*02、2*03P VIEW	24.01.04		UNIT:mm	0.00±0.25	X*±3°						
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN	LanXuan_Hou	23.9.19			REV: A2	SHEET: 1/1