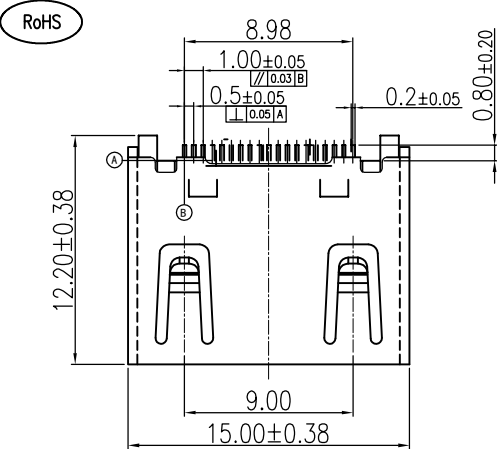
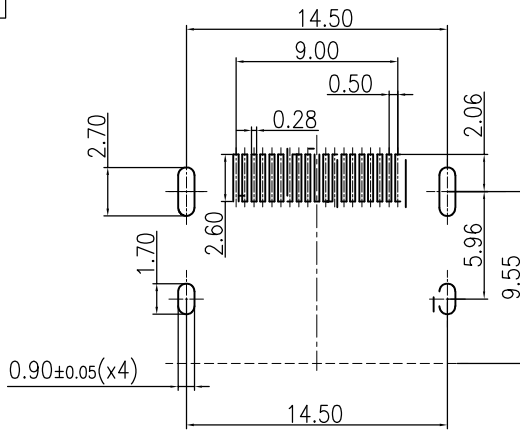
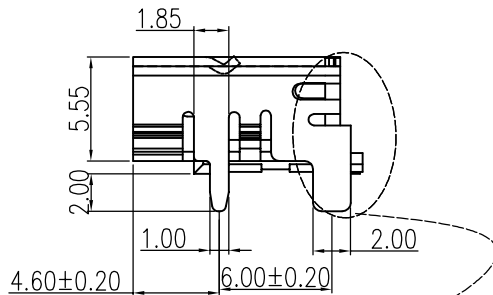
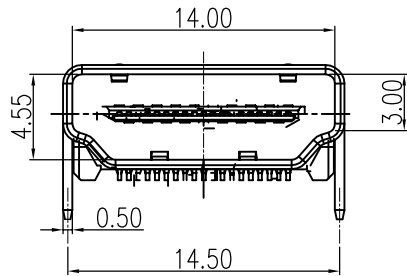




1	2	3	4	5	6	7	8								
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements															
A	RoHS 				NOTE: 1. Material: Housing: Thermoplastics,UL94V-0; COLOR: BLACK Contact: Copper Alloy Shell: SPCC 2. FINISH: Contact: Au Plated on Contact Arca, Matte Tin Plated on Solder Tails, Nickel Underplating Over All. Shell: Nickel Underplating Over All. 3. Specification: 3.1: Electrical: Insulation Resistance: 100MΩ Min. at 500V/DC for 1Minute. Contact Resistance: 10 mΩ Max. Dielectric Withstanding Voltage: No discharge, flashover or breakdown at 500V/AC 1Minute P/N: WLHDF9-19 2 X X 0 045 PLATING: 1-G/F COLOUR: A-BLACK										
B			SUGGESTED PCB LAYOUT GENERAL TOLERANCES:±0.05 												
C															
D															
E															
F															
G															
H	REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:				
	AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLHDF9-192XX0045					
					0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE: HDMI A TYPE Female 90° SMT 无耳有弹无侧弹 四脚不带卡点					
					UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang	21.01.13	REV: A0	SHEET: 1/1			
	1	2	3	4	5	6	7	8							