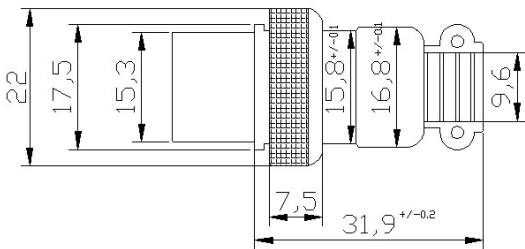
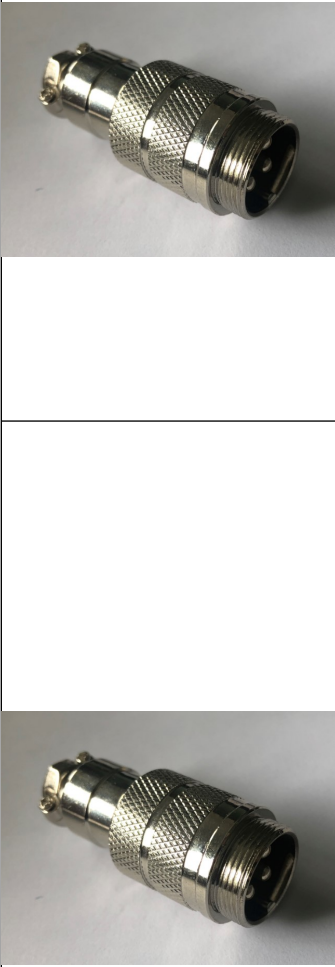
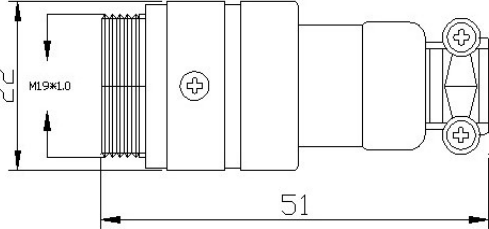


M20 圆形电连接器 电缆式插头

图例	安装尺寸	芯数	订货代号
		2	M20-2A
		3	M20-3A
		4	M20-4A
		5	M20-5A
		6	M20-6A
		7	M20-7A
			8
9			M20-9A
10			M20-10A
12			M20-12A
14			M20-14A
15			M20-15A

M20 圆形电连接器 空中对接插座

图例	安装尺寸	芯数	订货代号
		2	M20-2K
		3	M20-3K
		4	M20-4K
		5	M20-5K
		6	M20-6K
		7	M20-7K
		8	M20-8K
		9	M20-9K
		10	M20-10K
		12	M20-12K
		14	M20-14K
		15	M20-15K

M20 圆形电连接器 材料参数

主要用料

部件	外壳	绝缘体	接触件
材料	锌合金镀镍	胶木(热固性塑料)	铜合金镀银

芯数	2	3	4	5	6	7	8	9	10	10A	12	14	15
孔位排列													
额定电流/电压	10A-250V	7A-250V	7A-250V	7A-150V	5A-150V	5A-150V	5A-150V	5A-150V	5A-150V	5A-150V	5A-150V	5A-150V	5A-150V
工作电压 (AC.V) 分钟	250	250	200	200	200	200	200	200	200	200	200	200	200
耐电压 (AC.V) 分钟	1500	1500	1500	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
绝缘阻抗 (MΩ MIN.) DC 500V	1500	1500	1500	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
接触阻抗 (MΩ MIN.) DC 1A	3	3	3	3	3	3	3	3	3	3	3	3	3
焊杯口径Ø (mm)	2	2	2	1.2	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
接触体孔径Ø (mm)	2.95	2.95	2.95	2.95	2	2	1.5	1.5	1.5	1.5 2	1.5	1.5	1.5