
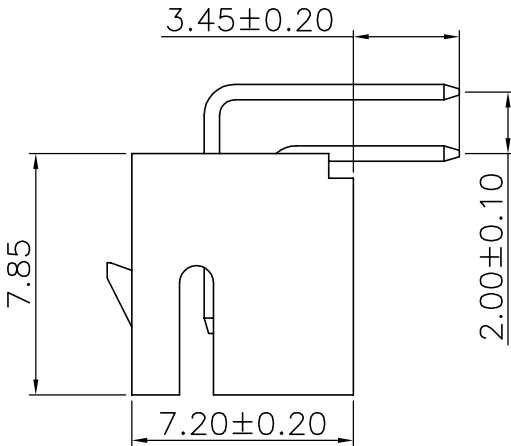
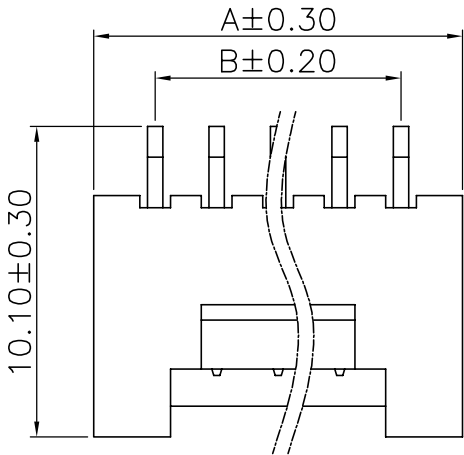
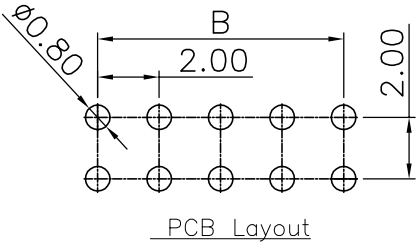
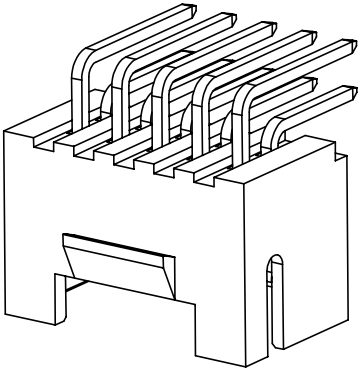


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

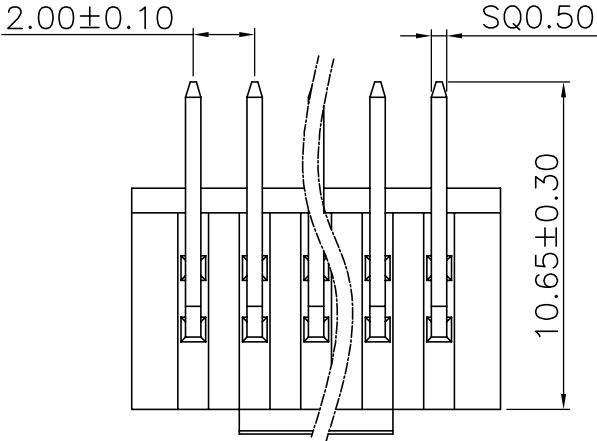

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA46,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN PLATING OVER NICKEL
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.0KGf/PIN MIN
3-2.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3.0A
RATED VOLTAGE : 250V AC/DC
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1000V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -25°C~+85°C.
5.PACKAGE SPEC: PE BAG
6.P/N:
A1 A2009 W 9 1-2 XX 1 X X 0
SERIES NO:
CONNECTOR:
W-WAFER
ANGLE:
9-90°
TYPE:
1-TYPE 1
ROW NO:
2-DOUBLE ROW
COLOR:
A-BLACK
S-NATURE
PLATING:
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE Tin
TERMIPOINT:
1-DIP
PIN Q'PY:
04~40

Ordering Information & Dimensions

Circuit	A	B	Circuit	A	B
2*02	6.00	2.00	2*12	26.00	22.00
2*03	8.00	4.00	2*13	28.00	24.00
2*04	10.00	6.00	2*14	30.00	26.00
2*05	12.00	8.00	2*15	32.00	28.00
2*06	14.00	10.00	2*16	34.00	30.00
2*07	16.00	12.00	2*17	36.00	32.00
2*08	18.00	14.00	2*18	38.00	34.00
2*09	20.00	16.00	2*19	40.00	36.00
2*10	22.00	18.00	2*20	42.00	38.00
2*11	24.00	20.00			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2009W91-2XX1XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.21			
A1	PART NUMBER RENEWAL	23.09.21		0.0±0.35	X°REF±6°	DESIGNER	Gao_Han	23.09.21	TITLE: Pitch 2.0mm 90° PHB双排不带定位弯针 Wafer		
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Gao_Han	23.09.21			
			SIZE: A4	0.000±0.10	X°X'±2°						
									REV: A1	SHEET: 1/1	