
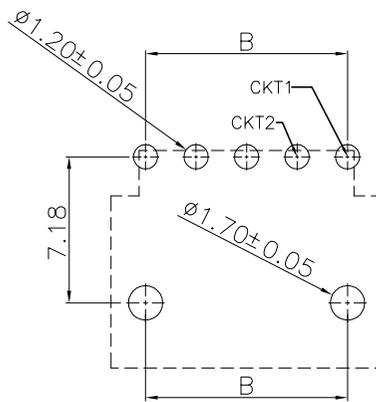
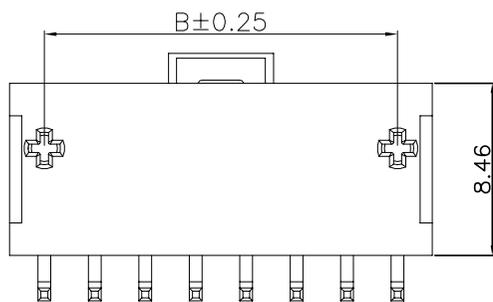




The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

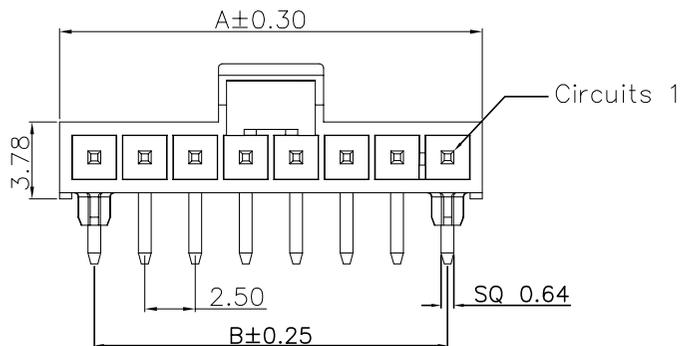

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: LCP,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 8A AC/DC
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 1500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC : TRAY
- 6.P/N:

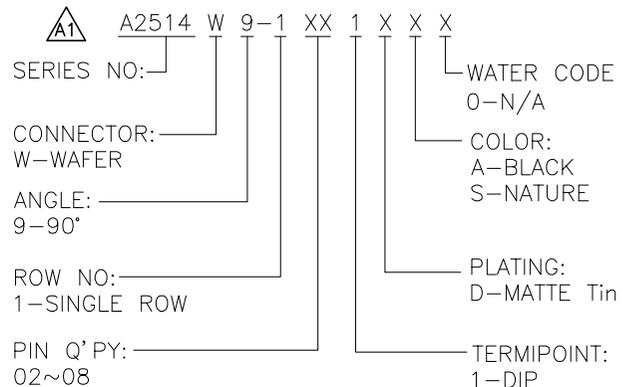

Dimensional infotmation(mm)

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
02	5.94	2.50	06	15.94	12.50
03	8.44	5.00	07	18.44	15.00
04	10.94	7.50	08	20.94	17.50
05	13.44	10.00			

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	TITLE:	REV: A1	SHEET: 1/2
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1	APPROVED	Wang_jr					
A1	PART NUMBER RENEWAL	23.09.25	0.00±0.25	X'±3'		DESIGNER	Han_Gao	23.09.25	A2514W9-1XX1XXX	ENDE05	Pitch 2.50mm MX 单排90° 带扣带定位柱 DIP型 Wafer		
			0.00±0.35	X*REF±6'		DRAWN	Zijun_Huang	23.09.25					




WanLian Technology Co., Ltd


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF


PIN位示意图




2 CKTS




3 CKTS




4 CKTS

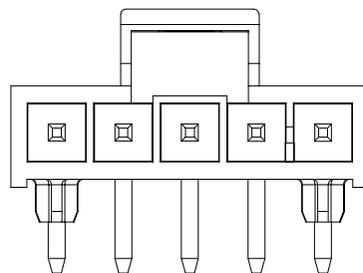


5 CKTS

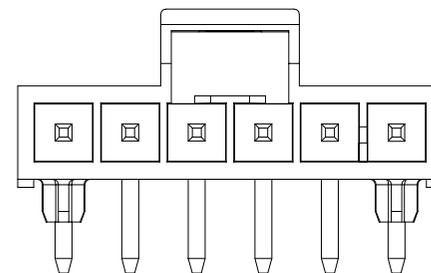

6 CKTS

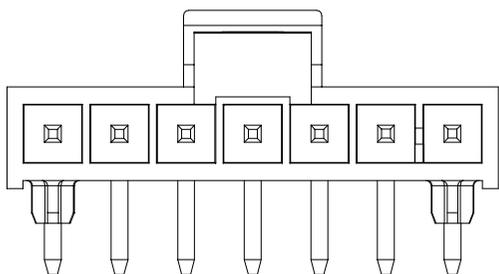


7 CKTS

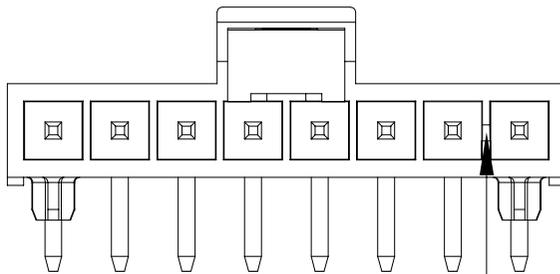

8 CKTS

KEY A

Color: Black

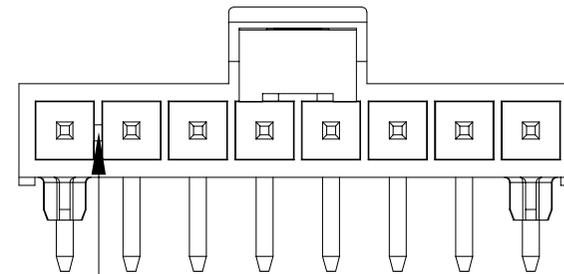

KEY B

8 CKTS

Color: Natural

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2514W9-1XX1XXX	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.25			
A1	PART NUMBER RENEWAL	23.09.25	UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	23.09.25	TITLE: Pitch 2.50mm MX 单排90°带扣带定位柱 DIP型 Wafer		
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	23.09.25		REV: A1	