

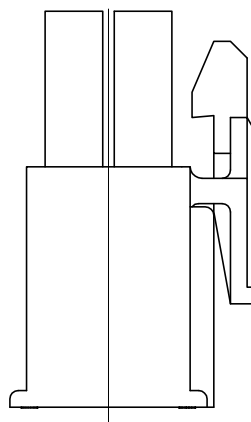
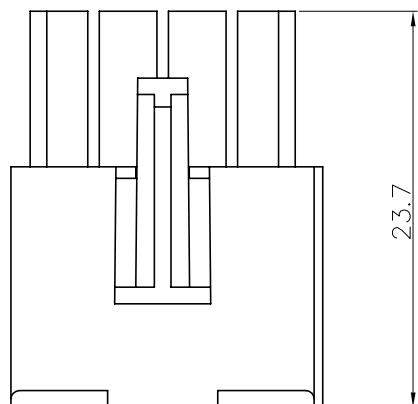


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

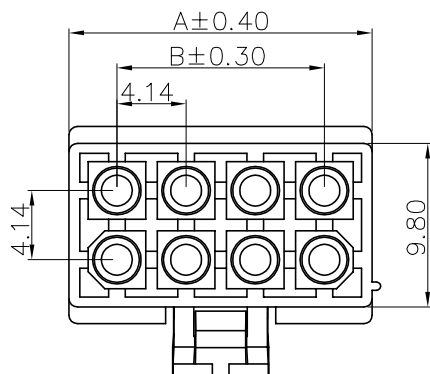

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PA66

2.ELECTRICAL PERFORMANCE:

2-1.CURRENT RATING: 7A

RATED VOLTAGE : 600V

2-2.CONTACT RESISTANCE: 20 mΩ MAX

2-3.INSULATION RESISTANCE: 1000MΩ Min

2-4.DIELECTRIC WITHSTANDING : 1500V AC

3.ENVIRONMENTAL PERFORMANCE:

3-1.OPERATING TEMPERATURE: -25°C~+85°C.

4.PACKAGE SPECPE BAG

5.P/N:

C4140 H M-2 XX X X
SERIES NO: H M-2 XX X X HOUSING: 0-UL94V-0
CONNECTOR: H HOUSING
H-HOUSING
MALE FEMALE: M MALE
M-MALE
F-FEMALE
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 04~24
COLOR: A-BLACK
S-NATURE

Circuit	Dimension(mm)		Circuit	Dimension(mm)	
	A	B		A	B
2*02	9.80	---	2*08	34.80	28.98
2*03	14.00	8.28	2*09	38.94	33.12
2*04	18.14	12.42	2*10	43.20	37.26
2*05	22.28	16.56	2*11	47.32	41.40
2*06	26.42	20.70	2*12	51.50	45.54
2*07	30.56	24.84			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1						
				0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.11.17	C4140HM-2XXXX	ENDE05	WanLian Technology Co., Ltd	
			UNIT: mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch 4.14mm Male 双排 Housing		REV: A0	SHEET: 1/2
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17				

1	2	3	4	5	6	7	8						
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements													
RoHS			各PIN位示意图1:2										
2*2P	2*5P	2*6P	2*7P	2*8P	2*9P								
2*10P		2*11P		2*12P									
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd		
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	C4140HM-2XXXX	ENDE05			
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch 4.14mm Male 双排 Housing				
				UNIT: mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang			21.11.17		
			SIZE: A4	0.000±0.10	X°X' ±2°							REV: A0	SHEET: 2/2
1	2	3	4	5	6	7	8						